



Luce & Light

Made in Italy

DATA SHEET / SCHEDA TECNICA

DC/DC CONVERTER WITH CABLE (L= 350 mm)
CONVERTITORE CON CAVO DC/DC (L= 350 mm)
CONVERTISSEUR AVEC CABLE DC/DC (L= 350 mm)
DC / DC-WANDLER MIT KABEL (L= 350 mm)
CONVERTIDOR CON CABLE CC/CC (L= 350 mm)



WFA024350 - WFA024500 - WFA024700

Power supply units and control gear / Alimentatori ed elettronica di controllo / Unités d'alimentation et électronique de contrôle /
Leistungs- und Steuerelektronik / Unidades de alimentación y electrónica de control

rev. 00 14/01/2021
A077



Tensione nominale ingresso [V]: 24 Vdc (20÷26 Vdc)
Nominal input voltage

Frequenza dimmerazione PWM [Hz]: 400 Hz
PWM dimming frequency

Corrente in uscita [mA]: 350/500/700 mA (±5%)
Output current


Tensione in uscita [Vdc]: $V_{in}-1V$ (@350)/ $V_{in}-1.3V$ (@500)/ $V_{in}-1.5V$ (@700)
Output voltage

Diametro cavo [mm]: 3.5 mm
Cable section

Lunghezza cavo [mm]: 350 mm
Cable length

Peso [g]: 11g
Weight

Tmax utilizzo [°C]: 55°C
Max temperature

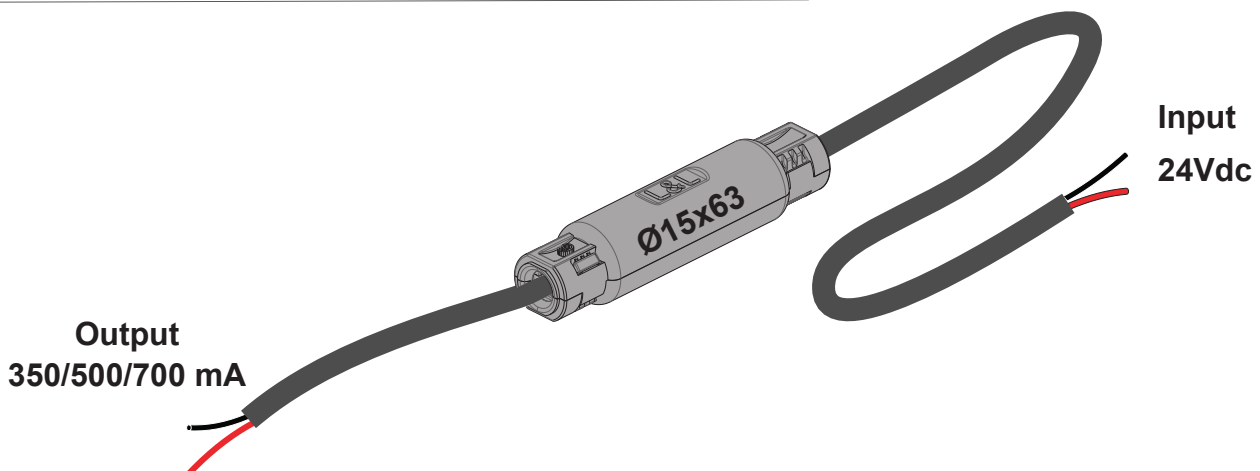

Code	In	Out
WFA024350	24Vdc	350mA
WFA024500	24Vdc	500mA
WFA024700	24Vdc	700mA