


OUTDOOR STEP LIGHTS ORIENTATION LIGHTING

2700K 3000K 4000K blue

RADIAL OPTICS Ø39 mm

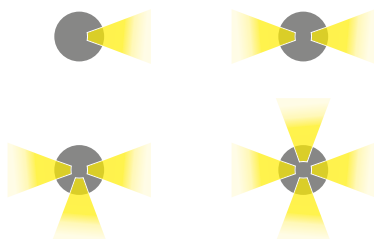

BRIGHT 1.A p. 415
max 2W max 700mA
constant current



BRIGHT 1.B p. 415
2.5W/3.5W 24Vdc
constant voltage

Ø78 mm





BRIGHT 4.7 p. 417
2W 24Vdc
constant voltage

Ø130 mm



BRIGHT 9.7 p. 417
4W 24Vdc
constant voltage



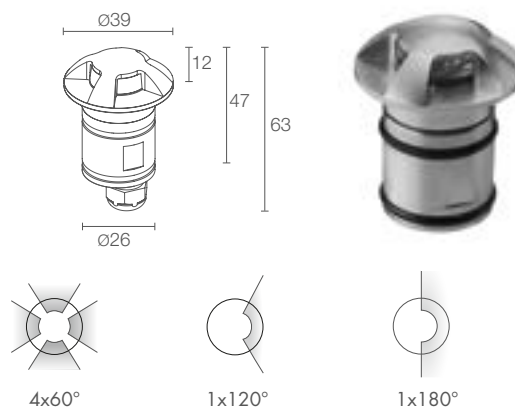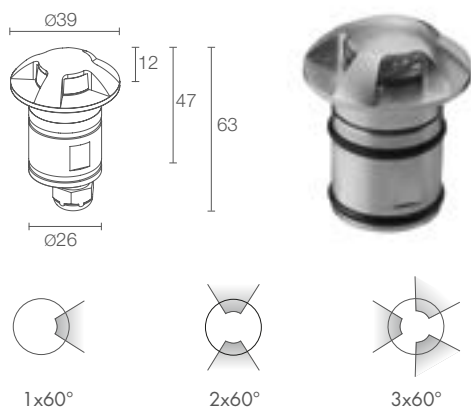

BRIGHT 1.A

Ø 80 mm
H 100 mm



kg 0.20 IP65 IP68 IK10

A A+ A++ IPS CASAMBI T max 50°C

POWER / POWER SUPPLY CODE

max 2W max 700mA
CB1A130 T I - Stainless steel

LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K 1 - blue
BEAMS	R1 - 1x60° R2 - 2x60° R3 - 3x60° R4 - 4x60° R5 - 1x120° R6 - 1x180°
POWER CABLES	includes 1.5 m neoprene cable H05RN-F 2x0.35/0.75 Ø6.3 mm 1 - 5 m 2 - 10 m 3 - 15 m 4 - 20 m
OPTICS	radial

LUMEN OUTPUT AT SOURCE	220 lm (3000K, 700mA)
DELIVERED LUMEN OUTPUT	56 lm (3000K, 700mA, 4x60°)
NO. AND TYPE OF LED	1 power LED 1/4 ANSI BIN (white LED colour) 50000h L90 B10 (Ta 25°C)
MATERIAL	body and trim in AISI 316L stainless steel
POWER SUPPLY UNIT	not included, see p. 904
WIRING	series
MOUNTING	recessed (wall, ground)
ACCESSORIES	see p. 419
PHOTOMETRIC DATA	see p. 802

BRIGHT 1.B

Ø 80 mm
H 100 mm



kg 0.20 IP65 IP68 IK10

A A+ A++ IPS CASAMBI T max 50°C

2.5W 24Vdc
CB1B000 T I - Stainless steel

3.5W 24Vdc
CB1B010 T I - Stainless steel


LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K 1 - blue
BEAMS	R1 - 1x60° R2 - 2x60° R3 - 3x60° R4 - 4x60° R5 - 1x120° R6 - 1x180°
POWER CABLES	includes 1.5 m neoprene cable H05RN-F 2x0.35/0.75 Ø6.3 mm 1 - 5 m 2 - 10 m 3 - 15 m 4 - 20 m
OPTICS	radial

LUMEN OUTPUT AT SOURCE	220 lm (3000K, 3.5W)
DELIVERED LUMEN OUTPUT	56 lm (3000K, 4x60°, 3.5W)
NO. AND TYPE OF LED	1 power LED 1/4 ANSI BIN (white LED colour) 50000h L90 B10 (Ta 25°C)
MATERIAL	body and trim in AISI 316L stainless steel
POWER SUPPLY UNIT	not included, see p. 904
WIRING	parallel
MOUNTING	recessed (wall, ground)
ACCESSORIES	see p. 419
PHOTOMETRIC DATA	see p. 802

< BRIGHT 1.B 3000K, 3.5W, 2x60°

Project by / arch. **Ciro Alfredo Matarante**
Photo by / **Alessio Tamborini**
Private residence, Foggia, Italy



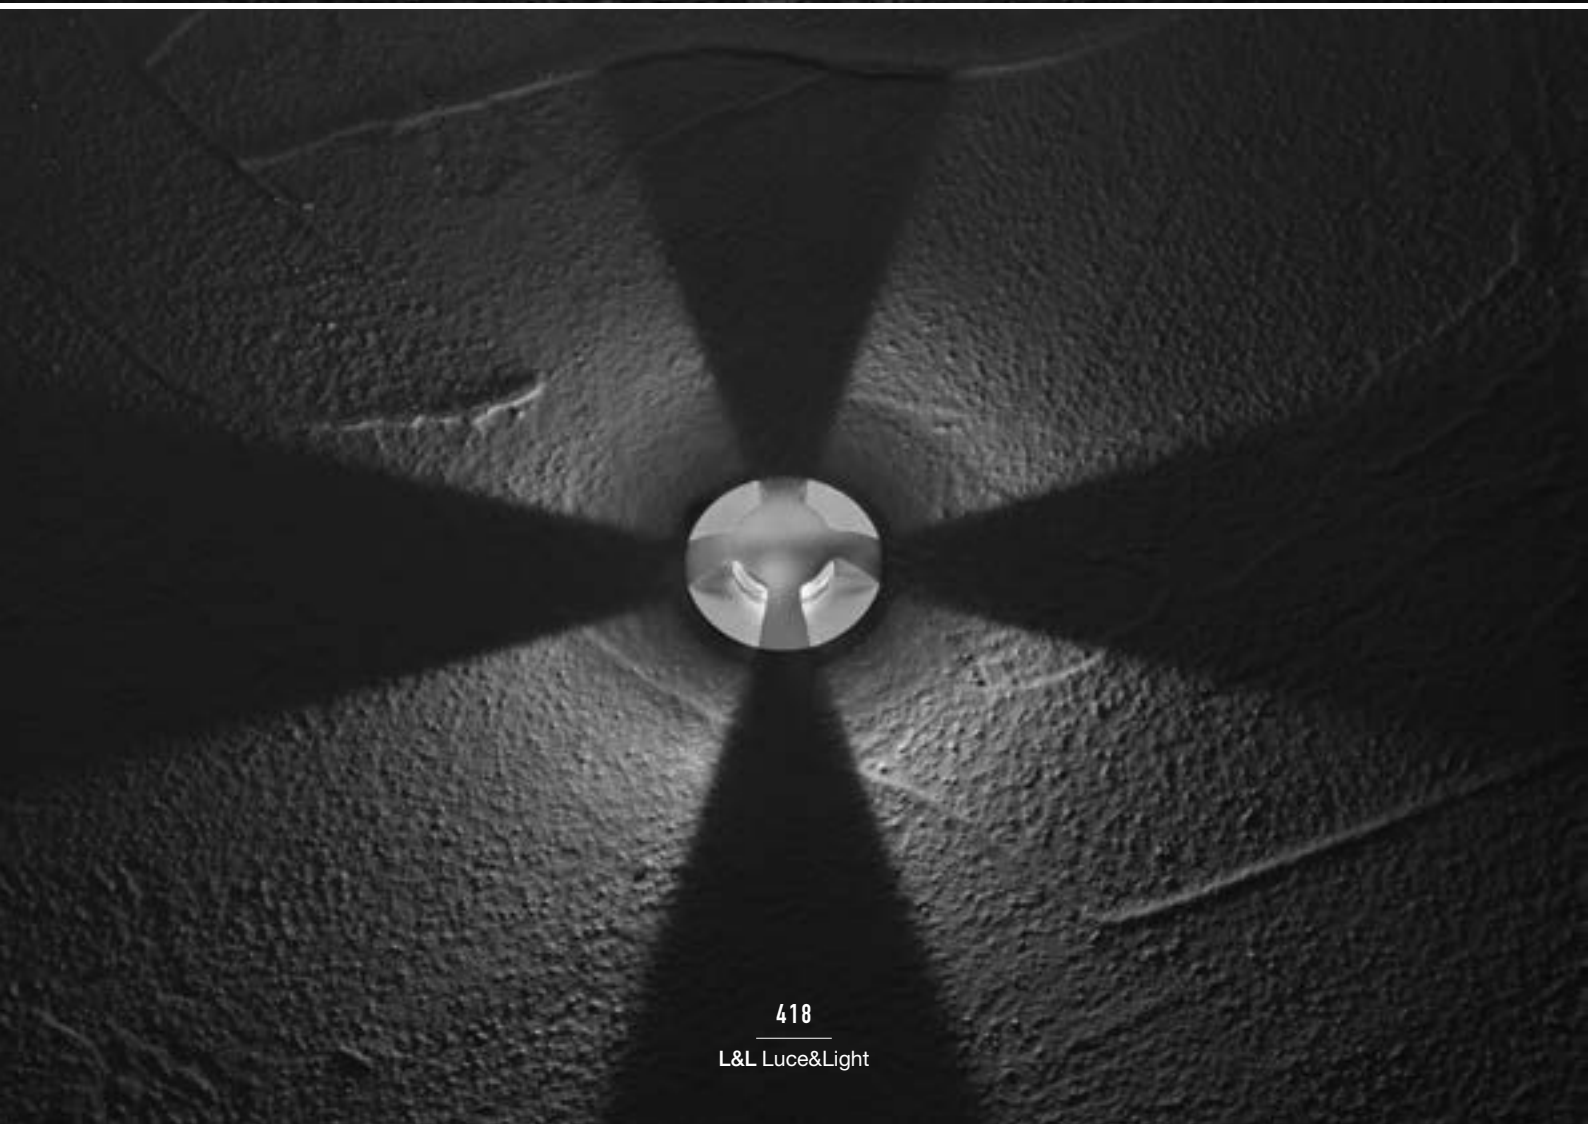

ACCESSORIES

ACCESSORIES FOR INSTALLATION



WC0202
Outer casing
(Bright 1.A / 1.B)



WC0100
Outer casing
(Bright 4.7)



WC0103
Outer casing
(Bright 4.7)



WC0150
Outer casing
(Bright 4.7)



WC0501
Outer casing
(Bright 9.7)



WC0601
Outer casing
(Bright 9.7)



WC0701
Outer casing
(Bright 9.7)


^ **BRIGHT 1.B**
4000K, 2.5W, 1°x180°

< **BRIGHT 1.B**
4000K, 2.5W, 4°x60°


BRIGHT

OUTDOOR STEP LIGHTS


BRIGHT 1.A 1.B

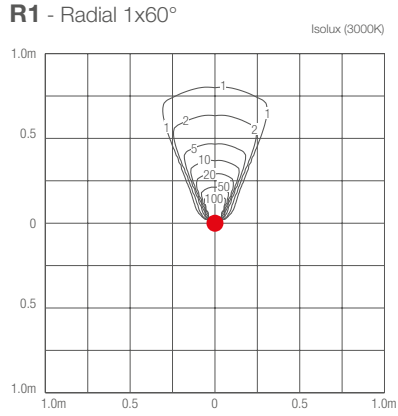

Bright 1.A **2W**
Bright 1.B **3.5W**

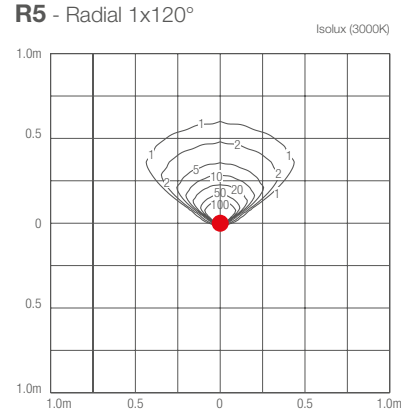


Bright 1.A **2W**
Bright 1.B **3.5W**

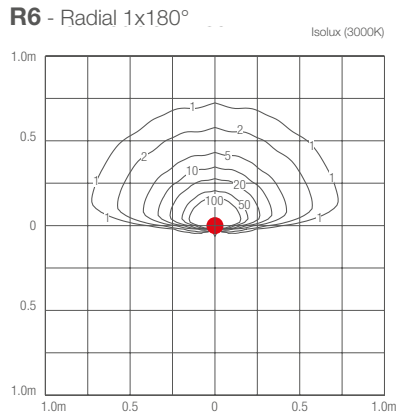

Bright 1.A **2W**
Bright 1.B **3.5W**

BRIGHT 4.7

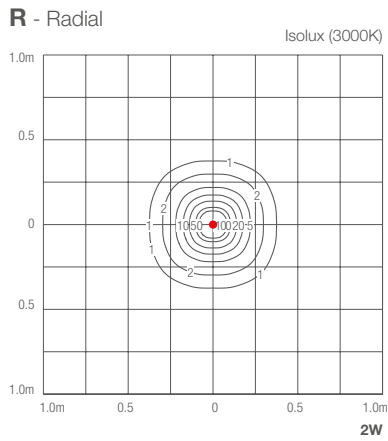

BRIGHT 9.7

