


## OUTDOOR STEP LIGHTS ORIENTATION LIGHTING

2700K 3000K 4000K blue

### RADIAL OPTICS Ø39 mm

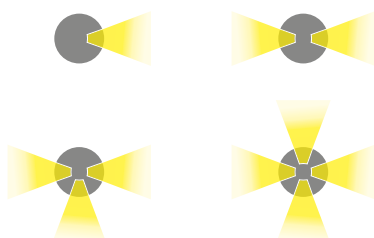

**BRIGHT 1.A** p. 415  
max 2W max 700mA  
constant current



**BRIGHT 1.B** p. 415  
2.5W/3.5W 24Vdc  
constant voltage

### Ø78 mm



**BRIGHT 4.7** p. 417  
2W 24Vdc  
constant voltage



### Ø130 mm



**BRIGHT 9.7** p. 417  
4W 24Vdc  
constant voltage





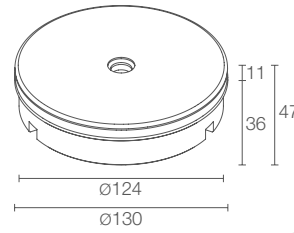

## BRIGHT 4.7

Required outer casing, not included



<b>POWER / POWER SUPPLY CODE</b>	2W 24Vdc <b>CB47000</b> ■ R I - ■
<b>LED COLOUR</b>	<b>F</b> - 2700K <b>5</b> - 3000K <b>9</b> - 4000K <b>1</b> - blue
<b>POWER CABLES</b>	includes 1.5 m neoprene cable H05RN-F 2x0.35/0.75 Ø6.3 mm <b>1</b> - 5 m <b>2</b> - 10 m <b>3</b> - 15 m <b>4</b> - 20 m
<b>OPTICS</b>	radial

LUMEN OUTPUT AT SOURCE	96 lm (3000K)
DELIVERED LUMEN OUTPUT	70 lm (3000K)
NO. AND TYPE OF LED	24 side-emitting LEDs 3-step MacAdam (white LED colour) 50000h L90 B10 (Ta 25°C)
MATERIAL	body in anodized aluminium trim in AISI 316L stainless steel screen in PMMA
POWER SUPPLY UNIT	not included, see p. 904
MOUNTING	recessed (ground)
ACCESSORIES	see p. 419
NOTES	not suitable for use in swimming pools or fountains underwater fixtures p. 728 tamper-resistant kit available on request
PHOTOMETRIC DATA	see p. 802

## BRIGHT 9.7

Required outer casing, not included




<b>POWER / POWER SUPPLY CODE</b>	4W 24Vdc <b>CB97000</b> ■ R I - ■
<b>LED COLOUR</b>	<b>F</b> - 2700K <b>5</b> - 3000K <b>9</b> - 4000K <b>1</b> - blue
<b>POWER CABLES</b>	includes 1.5 m neoprene cable H05RN-F 2x0.75/0.75 Ø6.3 mm <b>1</b> - 5 m <b>2</b> - 10 m <b>3</b> - 15 m <b>4</b> - 20 m
<b>OPTICS</b>	radial

LUMEN OUTPUT AT SOURCE	192 lm (3000K)
DELIVERED LUMEN OUTPUT	164 lm (3000K)
NO. AND TYPE OF LED	48 side-emitting LEDs 3-step MacAdam (white LED colour) 50000h L90 B10 (Ta 25°C)
MATERIAL	body in anodized aluminium trim in AISI 316L stainless steel screen in PMMA
POWER SUPPLY UNIT	not included, see p. 904
MOUNTING	recessed (ground)
ACCESSORIES	see p. 419
NOTES	tamper-resistant kit available on request
PHOTOMETRIC DATA	see p. 802

< **BRIGHT 9.7**  
customized version  
5000K, 9W

Project by / Dunsy Gindi  
Light planning by / Ailon Gavish Studio Twilight  
Photo by / Omri Amsalem  
Villa, Caesarea, Israel



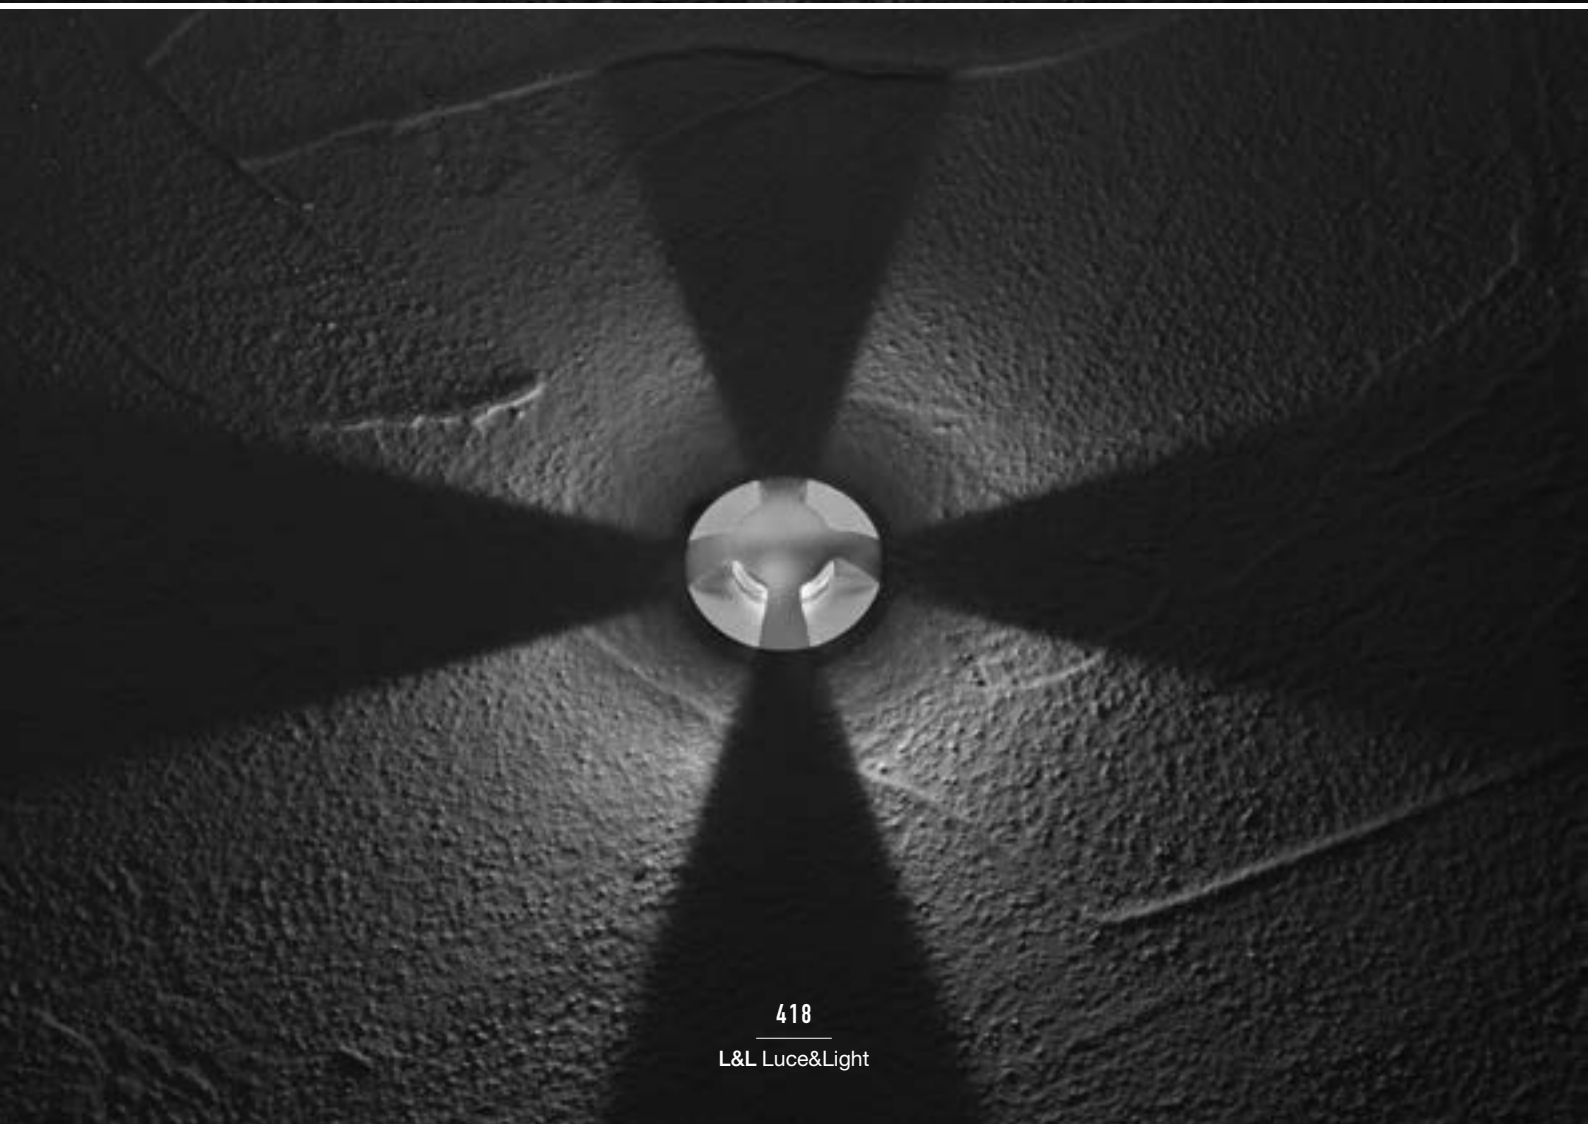

# ACCESSORIES

## ACCESSORIES FOR INSTALLATION



**WC0202**  
Outer casing  
(Bright 1.A / 1.B)



**WC0100**  
Outer casing  
(Bright 4.7)



**WC0103**  
Outer casing  
(Bright 4.7)



**WC0150**  
Outer casing  
(Bright 4.7)



**WC0501**  
Outer casing  
(Bright 9.7)



**WC0601**  
Outer casing  
(Bright 9.7)



**WC0701**  
Outer casing  
(Bright 9.7)


^ **BRIGHT 1.B**  
4000K, 2.5W, 1°x180°

< **BRIGHT 1.B**  
4000K, 2.5W, 4°x60°


# BRIGHT

## OUTDOOR STEP LIGHTS


### BRIGHT 1.A 1.B

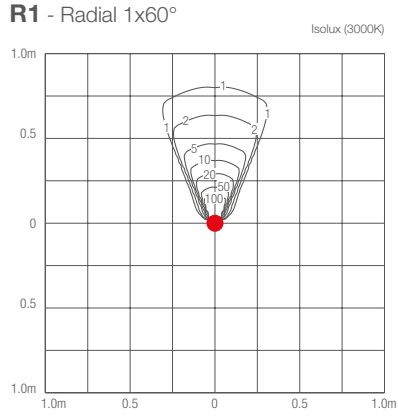

Bright 1.A **2W**  
Bright 1.B **3.5W**

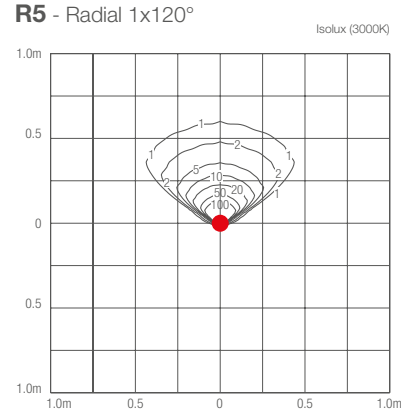


Bright 1.A **2W**  
Bright 1.B **3.5W**

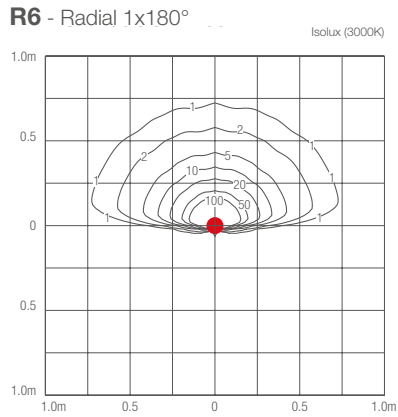

Bright 1.A **2W**  
Bright 1.B **3.5W**

### BRIGHT 4.7

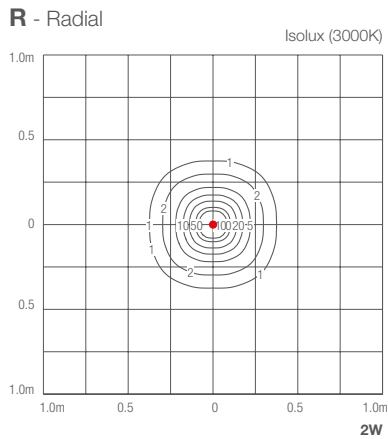

### BRIGHT 9.7

