


# EYES 3



**EYES 3.0**

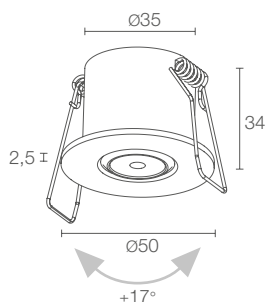


Ø 140 mm  
H 90 mm

Ø 40 mm  
kg 0.20 IP40  
A A+ A++



**EYES 3.1**

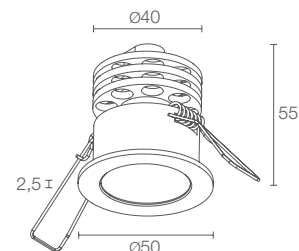

Ø 140 mm  
H 90 mm

Ø 43 mm  
kg 0.20 IP40  
A A+ A++

**POWER / POWER SUPPLY CODE**

max 2W max 500mA  
**FR1250** ■ ■ **E B** White  
**FR1250** ■ ■ **E C** Chrome  
**FR1250** ■ ■ **E D** Gold  
**FR1250** ■ ■ **E S** Satin  
**FR1250** ■ ■ **E N** Black

max 6W max 500mA blue/white light  
**F3250** ■ ■ **E B** White  
**F3250** ■ ■ **E C** Chrome  
**F3250** ■ ■ **E D** Gold  
**F3250** ■ ■ **E S** Satin  
**F3250** ■ ■ **E N** Black


max 6W max 500mA RGB light  
**F3250 6** ■ **B** White  
**F3250 6** ■ **C** Chrome  
**F3250 6** ■ **D** Gold  
**F3250 6** ■ **S** Satin  
**F3250 6** ■ **N** Black

■ <b>LED COLOUR</b>	<b>F</b> - 2700K <b>5</b> - 3000K <b>9</b> - 4000K <b>0</b> - 5000K <b>1</b> - blue
■ <b>OPTICS</b>	<b>S</b> - 10° tiltable ±17° <b>M</b> - 20° tiltable ±17° <b>L</b> - 40° tiltable ±17° <b>W</b> - 10°x45° tiltable ±17°
<b>LUMEN OUTPUT AT SOURCE</b>	145 lm (3000K, 500mA)
<b>DELIVERED LUMEN OUTPUT</b>	103 lm (3000K, 500mA, 20°)
<b>NO. AND TYPE OF LEDS</b>	1 power LED
<b>MATERIAL</b>	body in anodized aluminium trim in brass
<b>POWER SUPPLY UNIT</b>	not included, see p. 77 and 668
<b>POWER CABLES</b>	includes 1.5 m PVC cable FROR 2x0.35 Ø3.5 mm
<b>WIRING</b>	series
<b>MOUNTING</b>	recessed (ceiling)
<b>ACCESSORIES</b>	see p. 76
<b>NOTES</b>	version with 2200K LED colour and IP44 available on request

■ <b>LED COLOUR</b>	<b>F</b> - 2700K <b>5</b> - 3000K <b>9</b> - 4000K <b>0</b> - 5000K <b>1</b> - blue
■ <b>OPTICS</b>	<b>S</b> - 12° <b>M</b> - 24° <b>L</b> - 50°
<b>LUMEN OUTPUT AT SOURCE</b>	436 lm (3000K, 500mA) RGB: 308 lm, R: 113 lm G: 146 lm B: 49 lm (500mA)
<b>DELIVERED LUMEN OUTPUT</b>	348 lm (3000K, 500mA, 24°) RGB: 220 lm, R: 81 lm G: 104 lm B: 35 lm (500mA, 24°)
<b>NO. AND TYPE OF LEDS</b>	3 power LEDs
<b>MATERIAL</b>	body in anodized aluminium trim in brass
<b>POWER SUPPLY UNIT</b>	not included, see p. 77 and 668
<b>POWER CABLES</b>	includes 1.5 m PVC cable FROR 2x0.50 Ø5.0 mm RGB: includes 1.5 m PVC cable FROR 6x0.25 Ø4.6 mm
<b>WIRING</b>	series
<b>MOUNTING</b>	recessed (ceiling)
<b>ACCESSORIES</b>	see p. 76
<b>NOTES</b>	version with 2200K LED colour and IP44 available on request



**EYES 3.6**

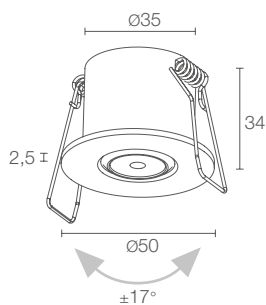

Ø 140 mm  
H 90 mm

Ø 40 mm


CE LED TECH III kg 0.20 IP40

A A+ A++

2W 24Vdc  
**F3600** ■ ■ **B** White  
**F3600** ■ ■ **C** Chrome  
**F3600** ■ ■ **D** Gold  
**F3600** ■ ■ **S** Satin  
**F3600** ■ ■ **N** Black



**EYES 3.7**

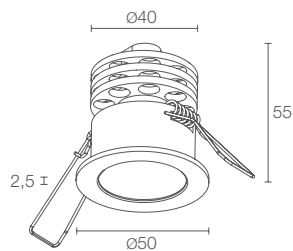

Ø 140 mm  
H 90 mm

Ø 43 mm

CE LED TECH III kg 0.20 IP40

A A+ A++

6W 24Vdc  
**F3700** ■ ■ **B** White  
**F3700** ■ ■ **C** Chrome  
**F3700** ■ ■ **D** Gold  
**F3700** ■ ■ **S** Satin  
**F3700** ■ ■ **N** Black

■	<b>F</b> - 2700K <b>5</b> - 3000K <b>9</b> - 4000K <b>0</b> - 5000K <b>1</b> - blue
■	<b>S</b> - 10° tiltable ±17° <b>M</b> - 20° tiltable ±17° <b>L</b> - 40° tiltable ±17° <b>W</b> - 10°x45° tiltable ±17°
145 lm (3000K)	
103 lm (3000K, 20°)	
1 power LED	
body in anodized aluminium trim in brass	
not included, see p. 77	
includes 1.5 m PVC cable FROR 2x0.35 Ø3.5 mm	
parallel	
recessed (ceiling)	
see p. 76	
version with 2200K LED colour and IP44 available on request	

■	<b>F</b> - 2700K <b>5</b> - 3000K <b>9</b> - 4000K <b>0</b> - 5000K <b>1</b> - blue
■	<b>S</b> - 12° <b>M</b> - 24° <b>L</b> - 50°
436 lm (3000K)	
348 lm (3000K, 24°)	
3 power LEDs	
body in anodized aluminium trim in brass	
not included, see p. 77	
includes 1.5 m PVC cable FROR 2x0.35 Ø3.5 mm	
parallel	
recessed (ceiling)	
see p. 76	
version with 2200K LED colour and IP44 available on request	

# EYES

## ACCESSORIES AND POWER SUPPLY UNITS

	EYES 2.0	EYES 2.1	EYES 2.2	EYES 2.3	EYES 2.7	EYES 2.9	EYES 3.0	EYES 3.1	EYES 3.6	EYES 3.7
<b>ACCESSORIES FOR INSTALLATION</b>										
 <p>Outer casing</p>	WC0201	WC0201	WC0201	WC0201	WC0201	WC0201				
 <p>Outer casing</p>	WC0202	WC0202	WC0202	WC0202	WC0202	WC0202				
 <p>Outer casing</p>							WC1500	WC1500	WC1500	WC1500
 <p>Outer casing</p>							WC1501	WC1501	WC1501	WC1501

### POWER CABLES

PVC cable  
FROR 2x0.35 Ø3.5 mm  
your choice of length

#### WF0110

(Eyes 1.0 / 1.2 / 2.0 / 2.1 / 2.2 / 2.3 / 3.0)

PVC cable  
FROR 2x0.50 Ø5.0 mm  
your choice of length

#### WF0100

(Eyes 3.1 / 4.0 / 5.0)  
white LED colour

PVC cable  
FROR 6x0.25 Ø3.5 mm  
your choice of length

#### WF0210

(Eyes 3.1 / 4.0 / 5.0)  
RGB

order together with the lighting fixture

**POWER SUPPLY UNITS** Eyes 1.0 / 1.2**350mA**

Max no. fixtures	PSU	IP	Page
1/3	A13350VL	20	669
1/15	ACUNI020T1	20	668 669
3/9	A19350QL	20	669
5/12	A312350QL	20	669
1/12 Dimmer	ADUNITC	20	672 673 674

**POWER SUPPLY UNITS** Eyes 2.0 / 2.1**350mA**

Max no. fixtures	PSU	IP	Page
1/3	A13350VL	20	669
1/15	ACUNI020T1	20	668 669
3/9	A19350QL	20	669
5/12	A312350QL	20	669
1/12 Dimmer	ADUNITC	20	672 673 674

**500mA**

Max no. fixtures	PSU	IP	Page
1/3	A13500TC	20	669
1/10	ACUNI020T1	20	668 669
2/5	A15500QL	20	669
5/10	A310500QL	20	669
1/12 Dimmer	ADUNITC	20	672 673 674

**POWER SUPPLY UNITS** Eyes 1.6 / 1.8 / 2.7 / 2.9 / 3.6 / 3.7 / 4.1 / 5.1

Max no. fixtures	PSU	IP	Page
1...n	24Vdc	20	671

**POWER SUPPLY UNITS** Eyes 2.2 / 2.3 / 3.0**350mA**

Max no. fixtures	PSU	IP	Page
1/2	A13350VL	20	669
1/15	ACUNI020T1	20	668 669
3/9	A19350QL	20	669
5/12	A312350QL	20	669
1/12 Dimmer	ADUNITC	20	672 673 674

**500mA**

Max no. fixtures	PSU	IP	Page
1/3	A13500TC	20	669
1/10	ACUNI020T1	20	668 669
2/5	A15500QL	20	669
5/10	A310500QL	20	669
1/12 Dimmer	ADUNITC	20	672 673 674

**POWER SUPPLY UNITS** Eyes 3.1**350mA**

Max no. fixtures	PSU	IP	Page
1	A13350VL	20	669
1/5	ACUNI020T1	20	668 669
1/3	A19350QL	20	669
2/4	A312350QL	20	669
1/4 Dimmer	ADUNITC	20	672 673 674

**500mA**

Max no. fixtures	PSU	IP	Page
1	A13500TC	20	669
1/3	ACUNI020T1	20	668 669
1	A15500QL	20	669
2/3	A310500QL	20	669
1/4 Dimmer	ADUNITC	20	672 673 674
-	RGB controller	-	679-684

**POWER SUPPLY UNITS** Eyes 4.0 / 5.0**350mA**

Max no. fixtures	PSU	IP	Page
1	A13350VL	20	669
1/3	A19350QL	20	669
1/5	ACUNI020T1	20	668 669
2/4	A312350QL	20	669
1/4 Dimmer	ADUNITC	20	672 673 674
-	RGB controller	-	679-684

**500mA**


Max no. fixtures	PSU	IP	Page
1	A13500TC	20	669
1/3	ACUNI020T1	20	668 669
2/3	A310500QL	20	669
1/4 Dimmer	ADUNITC	20	672 673 674
-	RGB controller	-	679-684

# EYES


## PHOTOMETRIC DATA

**EYES 1.0**  
**1.2**  
**1.6**  
**1.8**

**D - Diffuse**

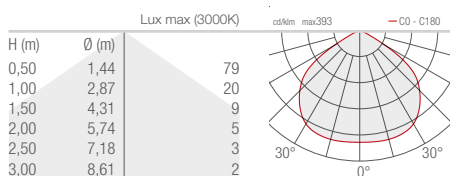


**F - 40°**

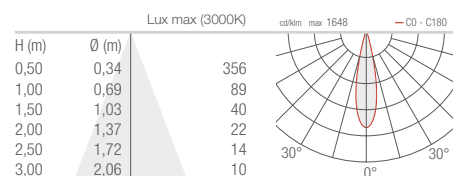


**EYES 2.1**  
**2.3**  
**2.7**  
**2.9**

**S - 10°**

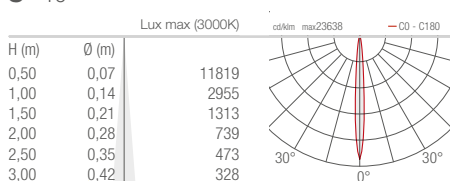


**M - 20°**

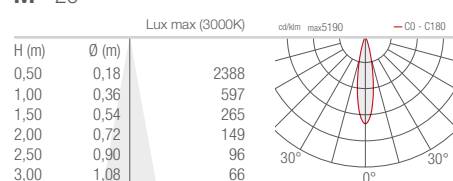


**EYES 3.0**  
**3.6**

**S - 10°**

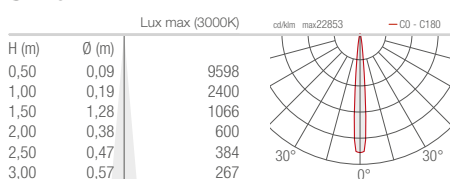


**M - 20°**

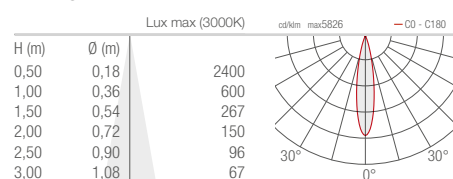


**EYES 3.1**  
**3.7**

**S - 12°**

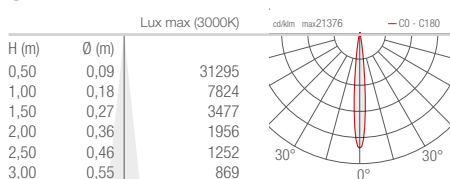


**M - 24°**

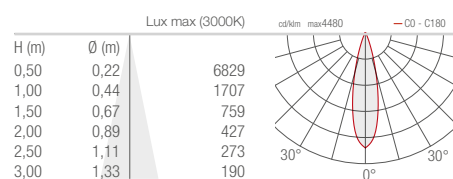


**EYES 4.0**  
**4.1**  
**5.0**  
**5.1**

**S - 10°**

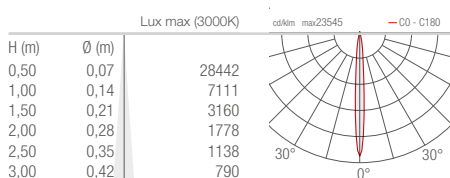


**M - 25°**

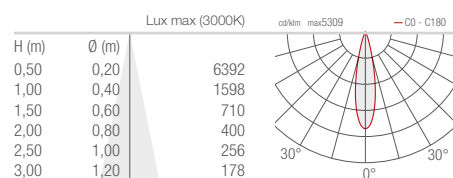


## EYES 2.0 2.2


### D - Diffuse

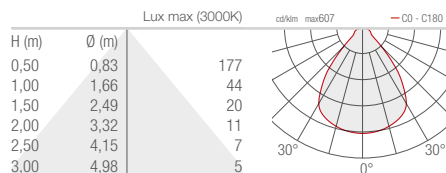


### L - 40°

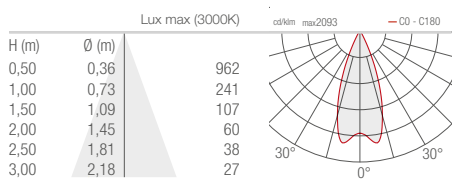


### W - 10°x45°

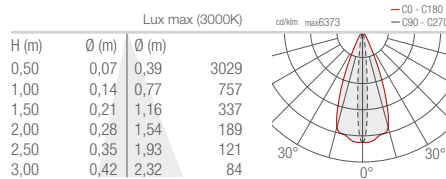


### L - 40°

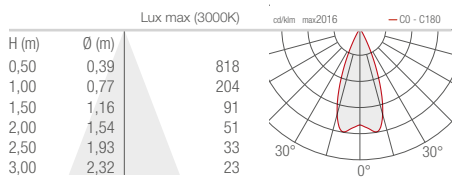

### W - 10°x45°

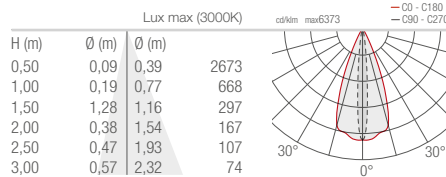

### L - 50°

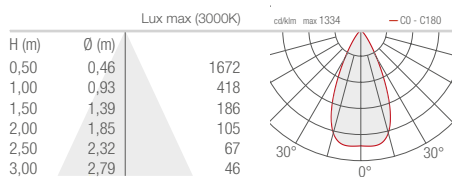

### L - 40°

