

## INDOOR WALL MOUNTED SINGLE BEAM, DIFFUSE LIGHT



diffuse



2700K 3000K 4000K

**INDOOR**

OUTDOOR

WALL MOUNTED



**ELLA IN 1.0** p. 624  
7W 230Vac  
493 lm (3000K)



**ELLA IN 2.0** p. 625  
13W 230Vac  
985 lm (3000K)



**ELLA IN 3.0** p. 625  
19W 230Vac  
1478 lm (3000K)

**ELLA OUT** p. 350



CEILING MOUNTED **ELLO IN** p. 658

**ELLO OUT** p. 380

< **ELLA IN 2.0**  
3000K, 13W, white

Project by / arch. Fernanda Cantone  
Light planning by / Light Style  
Castello Tafuri Charming Suites  
Portopalo di Capo Passero, Syracuse, Italy

v

**ELLA IN 3.0**

3000K, 19W, white


**ESEM MID 1.0**

3000K, 3W, 22°, white, customized IP44 version

Project and light planning by / DVDV Studio Architetti

Photo by / Alessio Tamborini

Private residence, Milan, Italy

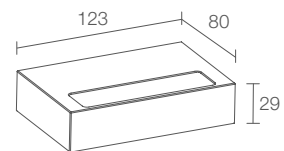

## ELLA IN 1.0

CE EAC LED TECH kg 0.40 IP40 IK08  
 A A+ A++

**POWER / POWER SUPPLY CODE**

7W 230Vac  
**EA1010 DB N** White  
**EA1010 DC N** Chrome  
**EA1010 D 1 N** Pure orange  
**EA1010 D 2 N** Reseda green  
**EA1010 D 3 N** Capri blue  
**EA1010 D 4 N** Light ivory

**LED COLOUR**

F - 2700K  
 5 - 3000K  
 9 - 4000K

**OPTICS**

diffuse

LUMEN OUTPUT AT SOURCE 954 lm (3000K)

DELIVERED LUMEN OUTPUT 493 lm (3000K)

NO. AND TYPE OF LED 18 mid-power LEDs  
 3-step MacAdam, 50000h L80 B10 (Ta 25°C)

MATERIAL body in aluminium  
 screen in serigraphed extra-clear microprismatic glass



POWER SUPPLY UNIT built in

MOUNTING surface mounted (wall)

ACCESSORIES see p. 626 and 627

NOTES outdoor version: Ella OUT 1.0, p. 352  
 ceiling-mounted version: Ello IN 1.0, p. 660  
 Casambi-compatible version, controllable with the Casambi app, available on request

PHOTOMETRIC DATA see p. 824

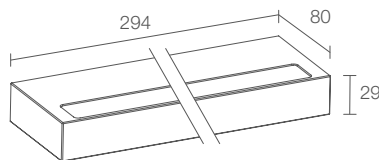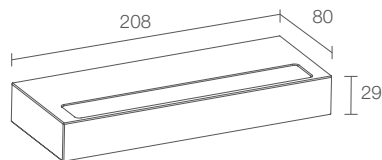

## ELLA IN 2.0



CE EAC LED kg 0.80 IP40 IK08

A A+ A++

13W 230Vac  
**EA2010** **DB N** White  
**EA2010** **DC N** Chrome  
**EA2010** **D 1 N** Pure orange  
**EA2010** **D 2 N** Reseda green  
**EA2010** **D 3 N** Capri blue  
**EA2010** **D 4 N** Light ivory

F - 2700K  
 5 - 3000K  
 9 - 4000K

diffuse

1908 lm (3000K)

985 lm (3000K)

36 mid-power LEDs  
 3-step MacAdam, 50000h L80 B10 (Ta 25°C)

body in aluminium  
 screen in serigraphed extra-clear  
 microprismatic glass

built in

surface mounted (wall)

see p. 626 and 627

outdoor version: Ella OUT 2.0, p. 353  
 ceiling-mounted version: Ello IN 2.0, p. 661  
 Casambi-compatible version, controllable with  
 the Casambi app, available on request

see p. 824

## ELLA IN 3.0



CE EAC LED kg 1.20 IP40 IK08

A A+ A++

19W 230Vac  
**EA3010** **DB N** White  
**EA3010** **DC N** Chrome  
**EA3010** **D 1 N** Pure orange  
**EA3010** **D 2 N** Reseda green  
**EA3010** **D 3 N** Capri blue  
**EA3010** **D 4 N** Light ivory

F - 2700K  
 5 - 3000K  
 9 - 4000K

diffuse

2862 lm (3000K)

1478 lm (3000K)

54 mid-power LEDs  
 3-step MacAdam, 50000h L80 B10 (Ta 25°C)

body in aluminium  
 screen in serigraphed extra-clear  
 microprismatic glass


built in

surface mounted (wall)


see p. 626 and 627

outdoor version: Ella OUT 3.0, p. 353  
 ceiling-mounted version: Ello IN 3.0, p. 661  
 Casambi-compatible version, controllable with  
 the Casambi app, available on request


see p. 824




## ACCESSORIES FOR INSTALLATION

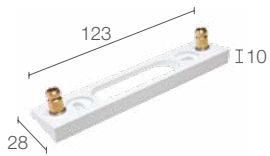

**WD0601B** - White  
**WD0601C** - Chrome  
**WD06011** - Pure orange  
**WD06012** - Reseda green  
**WD06013** - Capri blue  
**WD06014** - Light ivory  
Spacer for 15° inclination  
RAL finish available on request  
(Ella IN 1.0)

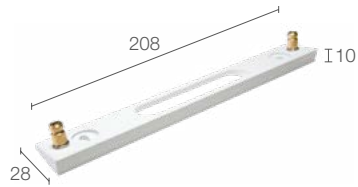

**WD0602B** - White  
**WD0602C** - Chrome  
**WD06021** - Pure orange  
**WD06022** - Reseda green  
**WD06023** - Capri blue  
**WD06024** - Light ivory  
Spacer for 15° inclination  
RAL finish available on request  
(Ella IN 2.0)

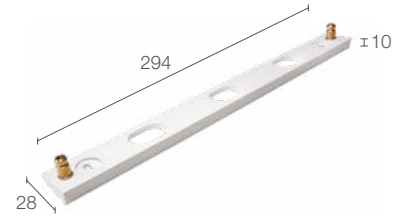

**WD0603B** - White  
**WD0603C** - Chrome  
**WD06031** - Pure orange  
**WD06032** - Reseda green  
**WD06033** - Capri blue  
**WD06034** - Light ivory  
Spacer for 15° inclination  
RAL finish available on request  
(Ella IN 3.0)

## ACCESSORIES

### STANDARD FINISHES



White



Chrome



Pure orange



Reseda green



Capri blue



Light ivory

∨  
ELLA IN 1.0  
without spacer




∨  
ELLA IN 1.0  
with spacer (15° inclination)




# ELLA IN / ELLA OUT

INDOOR WALL MOUNTED / OUTDOOR WALL MOUNTED

## ELLA IN 1.0 ELLA OUT 1.0

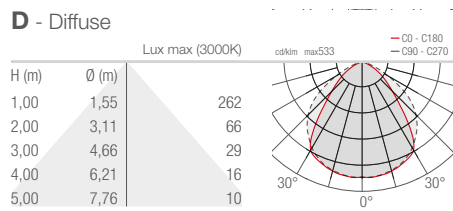

## ELLA IN 2.0 ELLA OUT 2.0

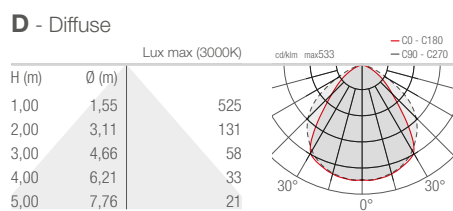

## ELLA IN 3.0 ELLA OUT 3.0

