

ELLO OUT

OUTDOOR CEILING MOUNTED WITH DIFFUSE LIGHT



diffuse



2700K 3000K 4000K

OUTDOOR

INDOOR

CEILING MOUNTED



ELLO OUT 1.0 p. 382
7W 230Vac
493 lm (3000K)



ELLO OUT 2.0 p. 383
16W 230Vac
985 lm (3000K)




ELLO OUT 3.0 p. 383
19W 230Vac
1478 lm (3000K)

ELLO IN p. 658

WALL MOUNTED

ELLA OUT p. 350

ELLA IN p. 622

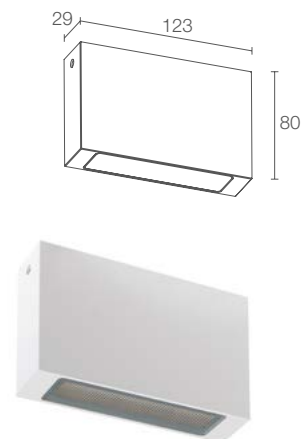

ELLO OUT 1.0

CE EAC LED TECH kg 0.40 IP65 IK08
 A A+ A++

POWER / POWER SUPPLY CODE 7W 230Vac
EP1010 **DET** White
EP1010 **DFT** Grey
EP1010 **DHT** Anthracite
EP1010 **DTT** Cor-ten

LED COLOUR
F - 2700K
5 - 3000K
9 - 4000K

OPTICS diffuse

LUMEN OUTPUT AT SOURCE 954 lm (3000K)

DELIVERED LUMEN OUTPUT 493 lm (3000K)

NO. AND TYPE OF LED 18 mid-power LEDs
 3-step MacAdam, 50000h L80 B10 (Ta 25°C)

MATERIAL body in aluminium
 screen in serigraphed extra-clear microprismatic glass

POWER SUPPLY UNIT built in



POWER CABLES includes 1.5 m neoprene cable
 H05RN-F 3x1.00 Ø7.0 mm

MOUNTING surface mounted (ceiling)

ACCESSORIES see p. 385

NOTES indoor version: Ello IN 1.0, p. 660
 wall-mounted version: Ella OUT 1.0, p. 352
 Casambi-compatible version, controllable with
 the Casambi app, available on request

PHOTOMETRIC DATA see p. 824

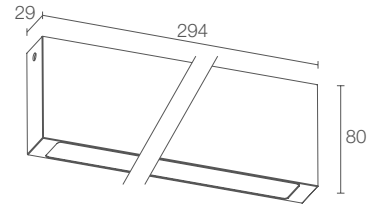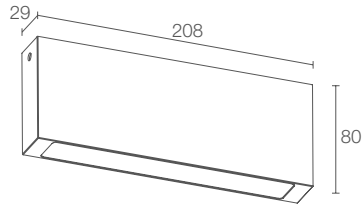

ELLO OUT 2.0

CE ENEC LED TECH kg 0.80 IP65 IK08
 A A+ A++

16W 230Vac
EP2010 D E T White
EP2010 D F T Grey
EP2010 D H T Anthracite
EP2010 D T T Cor-ten

F - 2700K
 5 - 3000K
 9 - 4000K

diffuse

1908 lm (3000K)

985 lm (3000K)

36 mid-power LEDs
 3-step MacAdam, 50000h L80 B10 (Ta 25°C)

body in aluminium
 screen in serigraphed extra-clear microprismatic glass

built in

includes 1.5 m neoprene cable
 H05RN-F 3x1.00 Ø7.0 mm

surface mounted (ceiling)

see p. 385

indoor version: Ello IN 2.0, p. 661
 wall-mounted version: Ella OUT 2.0, p. 353
 Casambi-compatible version, controllable with
 the Casambi app, available on request

see p. 824

ELLO OUT 3.0

CE ENEC LED TECH kg 1.20 IP65 IK08
 A A+ A++

19W 230Vac
EP3010 D E T White
EP3010 D F T Grey
EP3010 D H T Anthracite
EP3010 D T T Cor-ten

F - 2700K
 5 - 3000K
 9 - 4000K

diffuse

2862 lm (3000K)

1478 lm (3000K)

54 mid-power LEDs
 3-step MacAdam, 50000h L80 B10 (Ta 25°C)

body in aluminium
 screen in serigraphed extra-clear microprismatic glass

built in

includes 1.5 m neoprene cable
 H05RN-F 3x1.00 Ø7.0 mm

surface mounted (ceiling)

see p. 385

indoor version: Ello IN 3.0, p. 661
 wall-mounted version: Ella OUT 3.0, p. 353
 Casambi-compatible version, controllable with
 the Casambi app, available on request


see p. 824






ACCESSORIES


ACCESSORIES FOR INSTALLATION

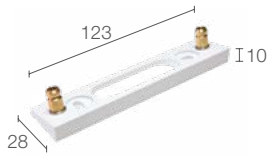

WD0651E - White
WD0651F - Grey
WD0651H - Anthracite
WD0651T - Cor-ten
 Spacer for 15° inclination
 RAL finish available on request
 (Ello OUT 1.0)

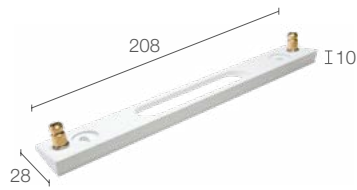

WD0652E - White
WD0652F - Grey
WD0652H - Anthracite
WD0652T - Cor-ten
 Spacer for 15° inclination
 RAL finish available on request
 (Ello OUT 2.0)

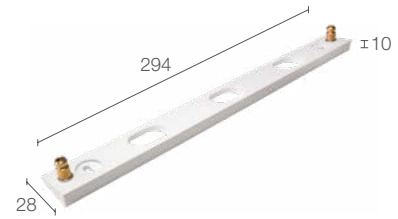

WD0653E - White
WD0653F - Grey
WD0653H - Anthracite
WD0653T - Cor-ten
 Spacer for 15° inclination
 RAL finish available on request
 (Ello OUT 3.0)

∨
ELLO OUT 1.0
 with spacer (15° inclination)



STANDARD FINISHES



White



Grey




Anthracite



Cor-ten


ELLO IN 1.0 ELLO OUT 1.0

D - Diffuse

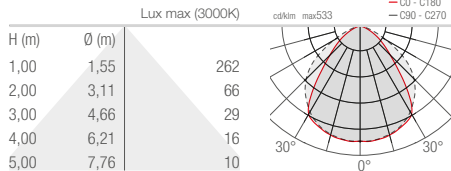

ELLO IN 2.0 ELLO OUT 2.0

D - Diffuse

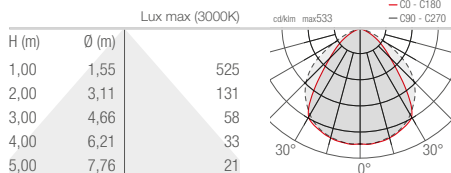

ELLO IN 3.0 ELLO OUT 3.0

D - Diffuse

