




OUTDOOR PROJECTORS ARCHITECTURAL LIGHTING FOR FACADES

2700K 3000K 4000K



SIRI 1.0 p. 264
9W 230Vac
ON/OFF



SIRI 2.0 p. 266
16W 230Vac
ON/OFF



SIRI 3.0 p. 268
23W 230Vac
ON/OFF, 0/1-10V



SIRI 1.1 p. 264
9W 230Vac
ON/OFF




SIRI 2.1 p. 266
16W 230Vac
ON/OFF



SIRI 3.1 p. 268
23W 230Vac
ON/OFF, 0/1-10V

RGBW



SIRI 1.2 p. 265
11W 24Vdc



SIRI 2.2 p. 267
20W 24Vdc



SIRI 3.2 p. 269
33W 24Vdc



SIRI 1.3 p. 265
11W 24Vdc



SIRI 2.3 p. 267
20W 24Vdc



SIRI 3.3 p. 269
33W 24Vdc

< **SIRI 2.0**
16W, 4000K, 30°, cor-ten
16W, 4000K, 40°, cor-ten
Carballeira de Moraña
Moraña, Pontevedra, Spain

RGBW
VERSION



IP66
SUITABLE FOR OUTDOOR
APPLICATIONS



BUILT-IN PROTECTION SYSTEMS:
IPS
INTELLIGENT PROTECTION SYSTEM



PID
PROTECTIVE IMPEDANCE DEVICE
(WHITE LED COLOUR)



NTC
BUILT-IN TEMPERATURE SENSOR
(SIRI 3.0 / 3.1)



6-STEP MATERIAL PROTECTION,
AND OXIDATION AND
CORROSION RESISTANCE

Low-copper-content aluminium alloy EN AB 47100

Preparation for painting

Epoxy paint

Polyester paint

Paints compliant with

Qualicoat automotive coating standard

Salt spray tested (over 1000 hours)



IK06 (SIRI 2/3)

IK07 (SIRI 1)

SCREEN IN 4-MM-THICK, TRANSPARENT
EXTRA-CLEAR GLASS, TEMPERED

FOR EXCELLENT RESISTANCE

TO KNOCKS AND SCRATCHES.

HIGH-TRANSMITTANCE VITRIFIED SERIGRAPHY

ENSURES CHROMATIC UNIFORMITY

BODY IN DIE-CAST LOW-COPPER-CONTENT

ALUMINIUM EN AB 47100

FOR EXCELLENT RESISTANCE

TO CORROSION



UNIQUE SELLING POINTS



RAL FINISH
ON REQUEST



WHITE




GREY



ANTHRACITE



THE 6° OPTICS MEAN THE BEAM CAN BE CONCENTRATED ON A SMALL AREA EVEN AT LARGE DISTANCES





INTEGRATED BASE FOR CONNECTIONS, AND PLATE ADJUSTABLE THROUGH 35°



ANTI-GLARE RECESSED OPTICS



SCALED, ADJUSTABLE BRACKET

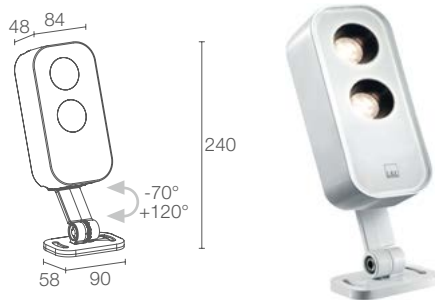

SIRI 1.0



IP66 IK07




POWER / POWER SUPPLY CODE

9W 230Vac
SR1010 ■ ■ **E** - ■ White
SR1010 ■ ■ **F** - ■ Grey
SR1010 ■ ■ **H** - ■ Anthracite
SR1010 ■ ■ **T** - ■ Cor-ten

LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	V - 6° S - 12° M - 30° L - 40° W - 10°x45°
POWER CABLES	includes 1.5 m neoprene cable H05RN-F 3x1.00 Ø7.0 mm 1 - 5 m 2 - 10 m 3 - 15 m 4 - 20 m

LUMEN OUTPUT AT SOURCE	603 lm (3000K)
DELIVERED LUMEN OUTPUT	422 lm (3000K, 30°)
NO. AND TYPE OF LED	2 power LEDs 1/4 ANSI BIN, 50000h L95 B10 (Ta 25°C)
MATERIAL	body in die-cast aluminium screen in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	built in
MOUNTING	surface mounted (ceiling, wall, ground, spike)
ACCESSORIES	see p. 271
NOTES	Casambi-compatible version, controllable with the Casambi app, available on request
PHOTOMETRIC DATA	see p. 874

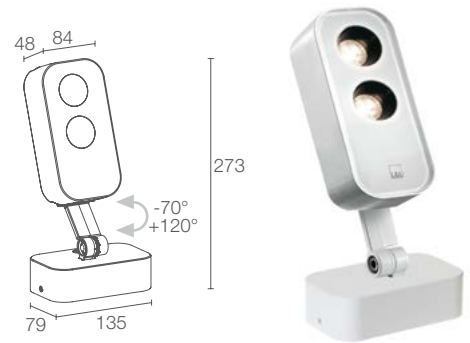

SIRI 1.1




IP66 IK07




9W 230Vac
SR1110 ■ ■ **E** White
SR1110 ■ ■ **F** Grey
SR1110 ■ ■ **H** Anthracite
SR1110 ■ ■ **T** Cor-ten


LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	V - 6° S - 12° M - 30° L - 40° W - 10°x45°
	includes 1.5 m neoprene cable H05RN-F 3x1.00 Ø7.0 mm

LUMEN OUTPUT AT SOURCE	603 lm (3000K)
DELIVERED LUMEN OUTPUT	422 lm (3000K, 30°)
NO. AND TYPE OF LED	2 power LEDs 1/4 ANSI BIN, 50000h L95 B10 (Ta 25°C)
MATERIAL	body in die-cast aluminium screen in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	built in
MOUNTING	surface mounted (ceiling, wall, ground)
ACCESSORIES	see p. 271
NOTES	Casambi-compatible version, controllable with the Casambi app, available on request
PHOTOMETRIC DATA	see p. 874






30°x60° optics



60°x30° optics

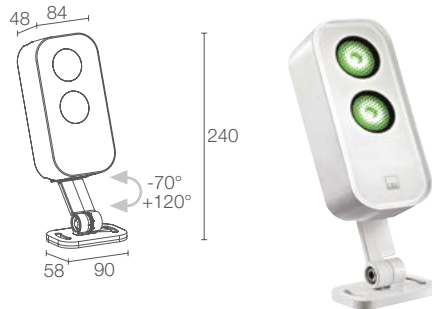

SIRI 1.2



IP66 IK07



POWER / POWER SUPPLY CODE

11W 24Vdc
SR1200 7 E White
SR1200 7 F Grey
SR1200 7 H Anthracite
SR1200 7 T Cor-ten

OPTICS

S - 21°
M - 32°
L - 58°
W - 30°x60°
X - 60°x30°

LED COLOUR

RGBW

LUMEN OUTPUT AT SOURCE 536 lm, R: 83 lm G: 150 lm B: 60 lm
 W: 243 lm (4000K)

DELIVERED LUMEN OUTPUT 379 lm, R: 59 lm G: 105 lm B: 42 lm
 W: 173 lm (4000K, 32°)

NO. AND TYPE OF LED 2 RGBW LED groups
 50000h L90 B10 (Ta 25°C)

MATERIAL body in die-cast aluminium
 screen in serigraphed and transparent, tempered extra-clear glass

POWER SUPPLY UNIT not included, see p. 904 and 917

POWER CABLES includes 1.5 m FEP+RUB cable
 (equivalent to H05RN-F) 6x0.50/0.50 Ø6.3 mm

MOUNTING surface mounted (ceiling, wall, ground, spike)

ACCESSORIES see p. 271

PHOTOMETRIC DATA see p. 874

SIRI 1.3



IP66 IK07



11W 24Vdc
SR1300 7 E White
SR1300 7 F Grey
SR1300 7 H Anthracite
SR1300 7 T Cor-ten

S - 21°
M - 32°
L - 58°
W - 30°x60°
X - 60°x30°

LED COLOUR

RGBW

536 lm, R: 83 lm G: 150 lm B: 60 lm
 W: 243 lm (4000K)

379 lm, R: 59 lm G: 105 lm B: 42 lm
 W: 173 lm (4000K, 32°)

2 RGBW LED groups
 50000h L90 B10 (Ta 25°C)

body in die-cast aluminium
 screen in serigraphed and transparent, tempered extra-clear glass


not included, see p. 904 and 917


includes 1.5 m FEP+RUB cable
 (equivalent to H05RN-F) 6x0.50/0.50 Ø6.3 mm

surface mounted (ceiling, wall, ground)

see p. 271

see p. 874



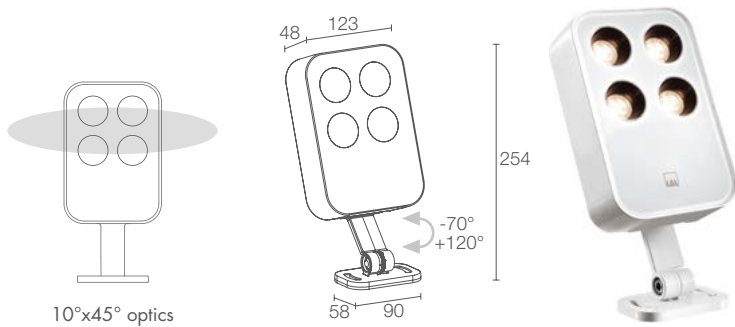

SIRI 2.0

CE EAC LED TECH kg 1.41

IP66 IK06

A A+ A++ IPS PID

POWER / POWER SUPPLY CODE

16W 230Vac
SR2010 E - White
SR2010 F - Grey
SR2010 H - Anthracite
SR2010 T - Cor-ten

LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	V - 6° S - 12° M - 30° L - 40° W - 10°x45°
POWER CABLES	includes 1.5 m neoprene cable H05RN-F 3x1.00 Ø7.0 mm 1 - 5 m 2 - 10 m 3 - 15 m 4 - 20 m

LUMEN OUTPUT AT SOURCE	1311 lm (3000K)
DELIVERED LUMEN OUTPUT	925 lm (3000K, 30°)
NO. AND TYPE OF LED	4 power LEDs 1/4 ANSI BIN, 50000h L95 B10 (Ta 25°C)
MATERIAL	body in die-cast aluminium screen in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	built in
MOUNTING	surface mounted (ceiling, wall, ground, spike)
ACCESSORIES	see p. 271
NOTES	Casambi-compatible version, controllable with the Casambi app, available on request
PHOTOMETRIC DATA	see p. 875



SIRI 2.1

CE EAC LED TECH kg 1.95


IP66 IK06


A A+ A++ IPS PID

16W 230Vac
SR2110 E - White
SR2110 F - Grey
SR2110 H - Anthracite
SR2110 T - Cor-ten


LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	V - 6° S - 12° M - 30° L - 40° W - 10°x45°
POWER CABLES	includes 1.5 m neoprene cable H05RN-F 3x1.00 Ø7.0 mm

LUMEN OUTPUT AT SOURCE	1311 lm (3000K)
DELIVERED LUMEN OUTPUT	925 lm (3000K, 30°)
NO. AND TYPE OF LED	4 power LEDs 1/4 ANSI BIN, 50000h L95 B10 (Ta 25°C)
MATERIAL	body in die-cast aluminium screen in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	built in
MOUNTING	surface mounted (ceiling, wall, ground)
ACCESSORIES	see p. 271
NOTES	Casambi-compatible version, controllable with the Casambi app, available on request
PHOTOMETRIC DATA	see p. 875







30°x60° optics



60°x30° optics

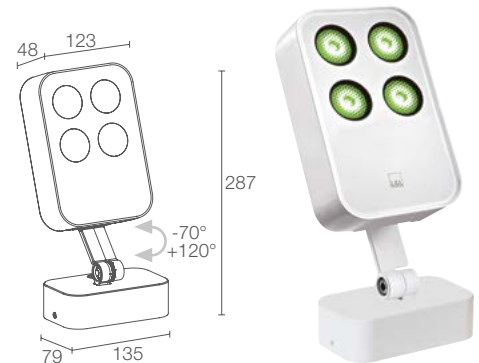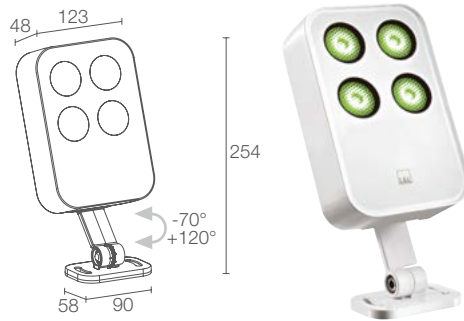

SIRI 2.2



IP66 IK06



POWER / POWER SUPPLY CODE

20W 24Vdc
SR2200 7 E White
SR2200 7 F Grey
SR2200 7 H Anthracite
SR2200 7 T Cor-ten

OPTICS

S - 21°
M - 32°
L - 58°
W - 30°x60°
X - 60°x30°

LED COLOUR

RGBW

LUMEN OUTPUT AT SOURCE 1059 lm, R: 165 lm G: 293 lm B: 118 lm
 W: 483 lm (4000K)

DELIVERED LUMEN OUTPUT 756 lm, R: 118 lm G: 209 lm B: 84 lm
 W: 345 lm (4000K, 32°)

NO. AND TYPE OF LED 4 RGBW LED groups
 50000h L90 B10 (Ta 25°C)

MATERIAL body in die-cast aluminium
 screen in serigraphed and transparent, tempered extra-clear glass

POWER SUPPLY UNIT not included, see p. 904 and 917

POWER CABLES includes 1.5 m FEP+RUB cable
 (equivalent to H05RN-F) 6x0.50/0.50 Ø6.3 mm

MOUNTING surface mounted (ceiling, wall, ground, spike)

ACCESSORIES see p. 271

PHOTOMETRIC DATA see p. 875

SIRI 2.3



IP66 IK06



20W 24Vdc
SR2300 7 E White
SR2300 7 F Grey
SR2300 7 H Anthracite
SR2300 7 T Cor-ten

S - 21°
M - 32°
L - 58°
W - 30°x60°
X - 60°x30°

LED COLOUR

RGBW

LUMEN OUTPUT AT SOURCE 1059 lm, R: 165 lm G: 293 lm B: 118 lm
 W: 483 lm (4000K)

DELIVERED LUMEN OUTPUT 756 lm, R: 118 lm G: 209 lm B: 84 lm
 W: 345 lm (4000K, 32°)

4 RGBW LED groups
 50000h L90 B10 (Ta 25°C)

body in die-cast aluminium
 screen in serigraphed and transparent, tempered extra-clear glass


not included, see p. 904 and 917


includes 1.5 m FEP+RUB cable
 (equivalent to H05RN-F) 6x0.50/0.50 Ø6.3 mm

surface mounted (ceiling, wall, ground)


see p. 271

see p. 875



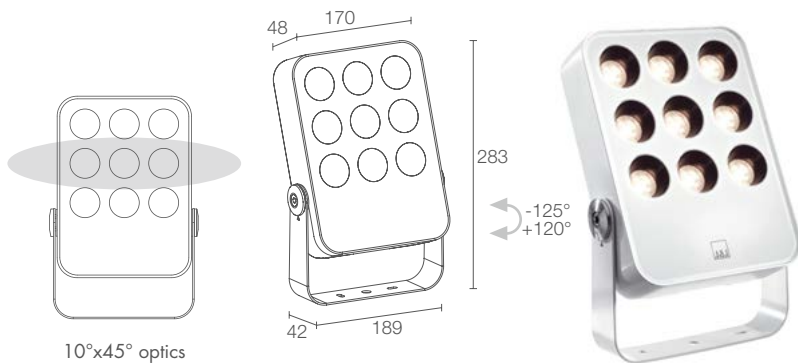

SIRI 3.0

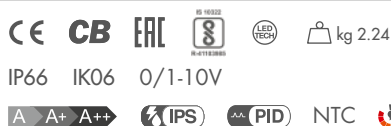

POWER / POWER SUPPLY CODE

23W 230Vac ON/OFF
SR3010 E - White
SR3010 F - Grey
SR3010 H - Anthracite
SR3010 T - Cor-ten


23W 230Vac 0/1-10V
SR3010 ER - White
SR3010 FR - Grey
SR3010 HR - Anthracite
SR3010 TR - Cor-ten

LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	V - 6° S - 12° M - 30° L - 40° W - 10°x45°
POWER CABLES	includes 1.5 m neoprene cable H05RN-F 3x1.00 Ø7.0 mm 1 - 5 m 2 - 10 m 3 - 15 m 4 - 20 m

LUMEN OUTPUT AT SOURCE	2214 lm (3000K)
DELIVERED LUMEN OUTPUT	1491 lm (3000K, 30°)
NO. AND TYPE OF LED	9 power LEDs 1/4 ANSI BIN, 50000h L95 B10 (Ta 25°C)
MATERIAL	body in die-cast aluminium screen in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	built in
MOUNTING	surface mounted (ceiling, wall, ground, spike)
ACCESSORIES	see p. 271
NOTES	Casambi-compatible version, controllable with the Casambi app, available on request
PHOTOMETRIC DATA	see p. 875



SIRI 3.1





23W 230Vac ON/OFF
SR3110 E - White
SR3110 F - Grey
SR3110 H - Anthracite
SR3110 T - Cor-ten

23W 230Vac 0/1-10V
SR3110 ER - White
SR3110 FR - Grey
SR3110 HR - Anthracite
SR3110 TR - Cor-ten


LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K
OPTICS	V - 6° S - 12° M - 30° L - 40° W - 10°x45°
POWER CABLES	includes 1.5 m neoprene cable H05RN-F 3x1.00 Ø7.0 mm

LUMEN OUTPUT AT SOURCE	2214 lm (3000K)
DELIVERED LUMEN OUTPUT	1491 lm (3000K, 30°)
NO. AND TYPE OF LED	9 power LEDs 1/4 ANSI BIN, 50000h L95 B10 (Ta 25°C)
MATERIAL	body in die-cast aluminium screen in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	built in
MOUNTING	surface mounted (ceiling, wall, ground)
ACCESSORIES	see p. 271
NOTES	Casambi-compatible version, controllable with the Casambi app, available on request
PHOTOMETRIC DATA	see p. 875






30°x60° optics



60°x30° optics

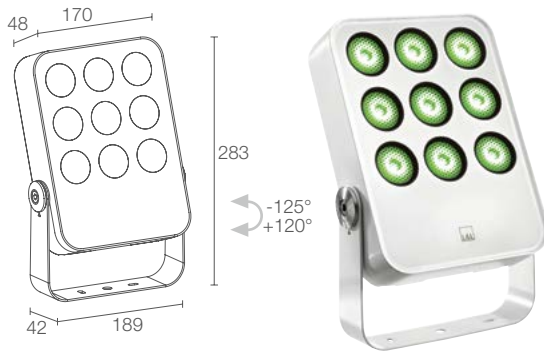

SIRI 3.2

SIRI 3.3



IP66 IK06



IP66 IK06



POWER / POWER SUPPLY CODE

33W 24Vdc
SR3200 7 ■ E White
SR3200 7 ■ F Grey
SR3200 7 ■ H Anthracite
SR3200 7 ■ T Cor-ten

33W 24Vdc
SR3300 7 ■ E White
SR3300 7 ■ F Grey
SR3300 7 ■ H Anthracite
SR3300 7 ■ T Cor-ten

OPTICS

S - 21°
M - 32°
L - 58°
W - 30°x60°
X - 60°x30°

S - 21°
M - 32°
L - 58°
W - 30°x60°
X - 60°x30°


LED COLOUR

RGBW

RGBW

LUMEN OUTPUT AT SOURCE	2148 lm, R: 336 lm G: 594 lm B: 238 lm W: 980 lm (4000K)
DELIVERED LUMEN OUTPUT	1532 lm, R: 240 lm G: 423 lm B: 170 lm W: 699 lm (4000K, 32°)
NO. AND TYPE OF LED	9 RGBW LED groups 50000h L90 B10 (Ta 25°C)
MATERIAL	body in die-cast aluminium screen in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	not included, see p. 904 and 917
POWER CABLES	includes 1.5 m FEP+RUB cable (equivalent to H05RN-F) 6x0.50/0.50 Ø6.3 mm
MOUNTING	surface mounted (ceiling, wall, ground, spike)
ACCESSORIES	see p. 271
PHOTOMETRIC DATA	see p. 875

LUMEN OUTPUT AT SOURCE	2148 lm, R: 336 lm G: 594 lm B: 238 lm W: 980 lm (4000K)
DELIVERED LUMEN OUTPUT	1532 lm, R: 240 lm G: 423 lm B: 170 lm W: 699 lm (4000K, 32°)
NO. AND TYPE OF LED	9 RGBW LED groups 50000h L90 B10 (Ta 25°C)
MATERIAL	body in die-cast aluminium screen in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	not included, see p. 904 and 917
POWER CABLES	includes 1.5 m FEP+RUB cable (equivalent to H05RN-F) 6x0.50/0.50 Ø6.3 mm
MOUNTING	surface mounted (ceiling, wall, ground)
ACCESSORIES	none
PHOTOMETRIC DATA	see p. 875







ACCESSORIES

ANTI-GLARE ACCESSORIES



Honeycomb louvre built into the lighting fixture

order together with the lighting fixture

the honeycomb louvre can be fitted on all optics except for the 6° optics



Anti-glare hood

the anti-glare hood is available on request in the same finish as the lighting fixture

ACCESSORIES FOR INSTALLATION



Spike for in-ground installation


SIRI 1.0	WH5010	WB5010H - Anthracite 89x90 mm h 173 mm	WP0300
SIRI 1.1	WH5010	WB5010H - Anthracite 89x90 mm h 173 mm	
SIRI 1.2		WB5010H - Anthracite 89x90 mm h 173 mm	WP0300
SIRI 1.3		WB5010H - Anthracite 89x90 mm h 173 mm	
SIRI 2.0	WH5020	WB5020H - Anthracite 127x90 mm h 187 mm	WP0300
SIRI 2.1	WH5020	WB5020H - Anthracite 127x90 mm h 187 mm	
SIRI 2.2		WB5020H - Anthracite 127x90 mm h 187 mm	WP0300
SIRI 2.3		WB5020H - Anthracite 127x90 mm h 187 mm	
SIRI 3.0	WH5030	WB5030H - Anthracite 174x101 mm h 190 mm	WP0300
SIRI 3.1	WH5030		
SIRI 3.2		WB5030H - Anthracite 174x101 mm h 190 mm	WP0300

< SIRI 3.0
3000K, 23W, 30°, white


Project by / Corinne Vezzoni & Associés
Light planning by / 8'18"
thecamp, Aix-en-Provence, France

SIRI 1.0 1.1


V - 6°

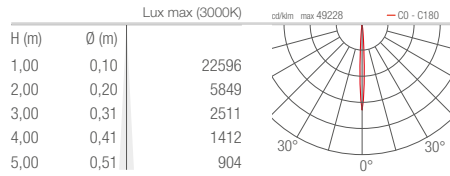


S - 12°

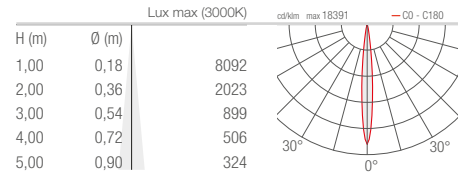


M - 30°

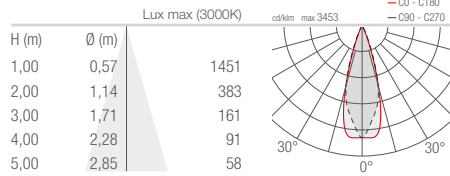

L - 40°

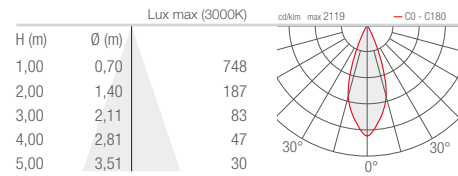


W - 10°x45°

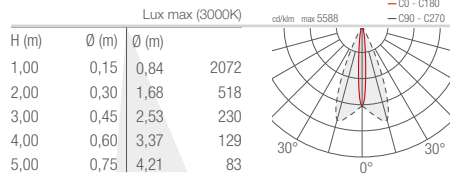


SIRI 1.2 1.3


S - 21°

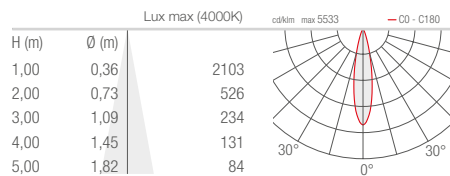


M - 32°

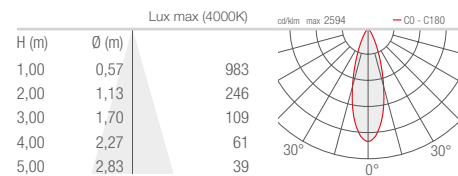


L - 58°

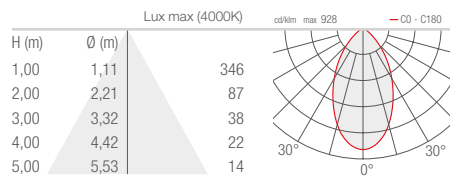

W - 30°x60°

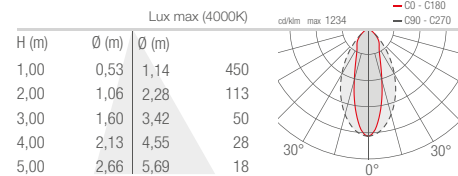


X - 60°x30°

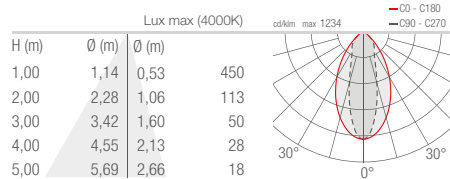


SIRI 2.0
2.1


V - 6°

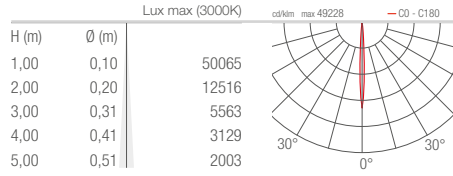


S - 12°

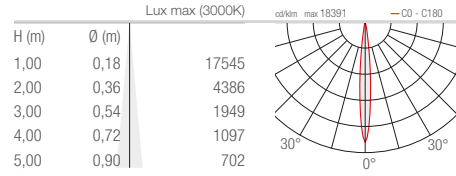


M - 30°

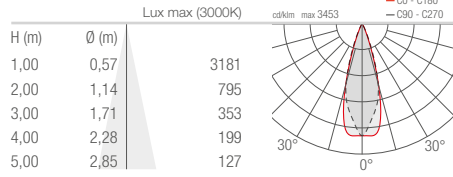

L - 40°

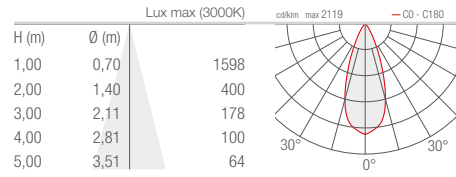


W - 10°x45°

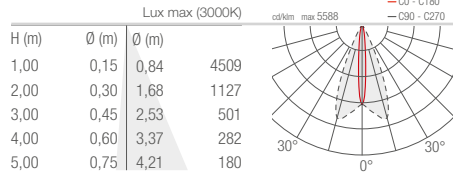


SIRI 2.2
2.3


S - 21°

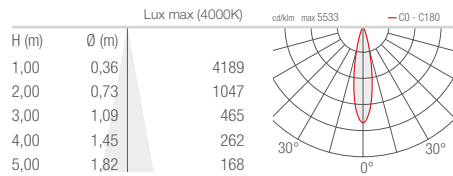


M - 32°

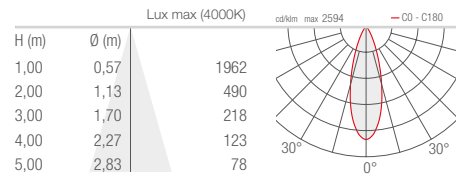


L - 58°

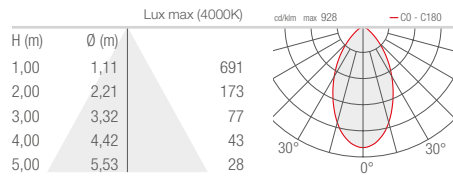

W - 30°x60°

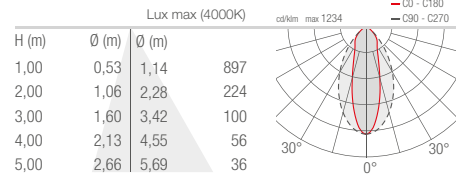


X - 60°x30°

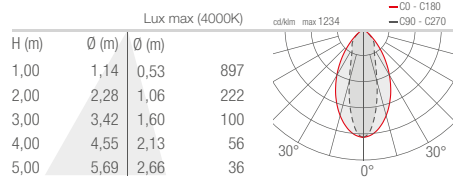


SIRI 3.0 3.1


V - 6°

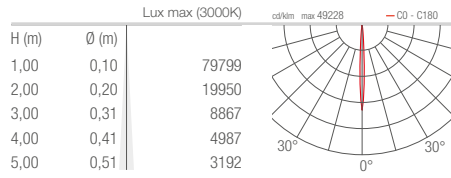


S - 12°

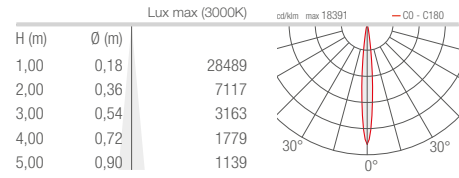


M - 30°

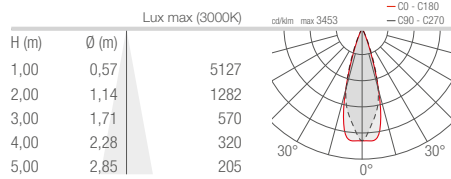

L - 40°

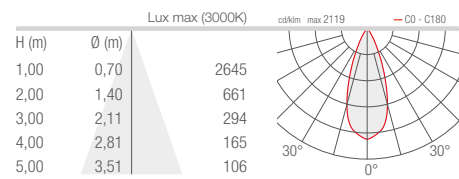


W - 10°x45°

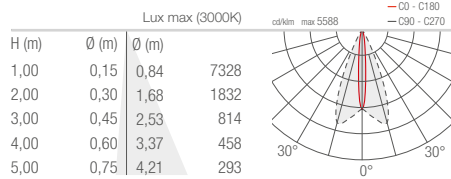


SIRI 3.2 3.3


S - 21°

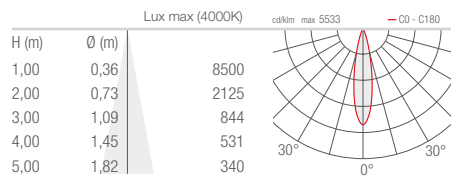


M - 32°

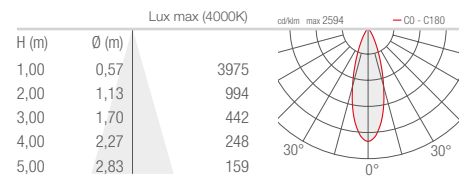

L - 58°

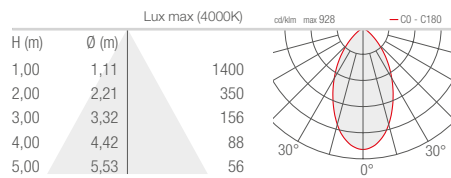

W - 30°x60°

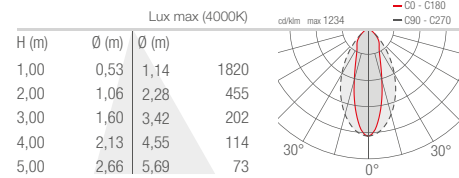

X - 60°x30°

