

STEP INSIDE

INDOOR STEP LIGHTS ORIENTATION LIGHT

INDOOR



SQUARE COVER



ROUND COVER

SEMI-RECESSED



diffuse

2700K 3000K 4000K 5000K blue



STEP INSIDE 2.2 p. 706
max 2W max 500mA
constant current



STEP INSIDE 2.3 p. 706
max 2W max 500mA
constant current





STEP INSIDE 2.8 p. 707
2W 24Vdc
constant voltage



STEP INSIDE 2.9 p. 707
2W 24Vdc
constant voltage

OUTDOOR

STEP OUTSIDE p. 430

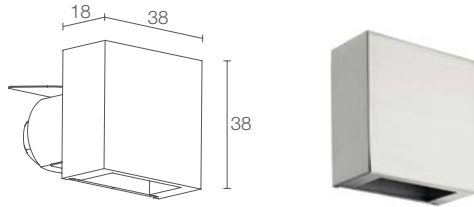

STEP INSIDE 2.2

Ø 70 mm
 H 70 mm
 Ø 30 mm

kg 0.18 IP40
 CASAMBI

POWER / POWER SUPPLY CODE

max 2W max 500mA
SP2212 **D E** White
SP2212 **D C** Chrome
SP2212 **D S** Satin
SP2212 **D N** Black
SP2212 **D T** Cor-ten
SP2212 **D 4** Light ivory

LED COLOUR

F - 2700K
5 - 3000K
9 - 4000K
0 - 5000K
1 - blue

OPTICS

diffuse

LUMEN OUTPUT AT SOURCE 145 lm (3000K, 500mA)

DELIVERED LUMEN OUTPUT 35 lm (3000K, 500mA)

NO. AND TYPE OF LED 1 power LED
 1/4 ANSI BIN (white LED colour)
 50000h L90 B10 (Ta 25°C)

MATERIAL body and cover in aluminium
 screen in transparent extra-clear glass

POWER SUPPLY UNIT not included, see p. 904

POWER CABLES includes 1.5 m PVC cable
 FROR 2x0.35/0.35 Ø3.5 mm



WIRING series

MOUNTING semi-recessed (wall)

ACCESSORIES see p. 709

NOTES outdoor version: Step Outside 2.0, p. 432

PHOTOMETRIC DATA see p. 884

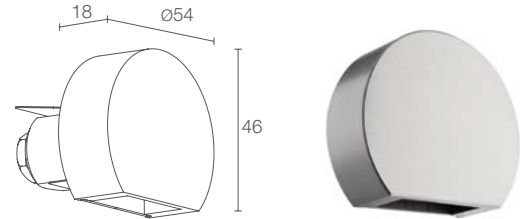

STEP INSIDE 2.3

Ø 70 mm
 H 70 mm
 Ø 30 mm

kg 0.20 IP40
 CASAMBI

max 2W max 500mA
SP2312 **D E** White
SP2312 **D C** Chrome
SP2312 **D S** Satin
SP2312 **D N** Black
SP2312 **D T** Cor-ten
SP2312 **D 4** Light ivory

F - 2700K
5 - 3000K
9 - 4000K
0 - 5000K
1 - blue

diffuse

LUMEN OUTPUT AT SOURCE 145 lm (3000K, 500mA)

DELIVERED LUMEN OUTPUT 35 lm (3000K, 500mA)

NO. AND TYPE OF LED 1 power LED
 1/4 ANSI BIN (white LED colour)
 50000h L90 B10 (Ta 25°C)

MATERIAL body and cover in aluminium
 screen in transparent extra-clear glass

POWER SUPPLY UNIT not included, see p. 904

POWER CABLES includes 1.5 m PVC cable
 FROR 2x0.35/0.35 Ø3.5 mm



WIRING series

MOUNTING semi-recessed (wall)

ACCESSORIES see p. 709

NOTES outdoor version: Step Outside 2.1, p. 432

PHOTOMETRIC DATA see p. 884

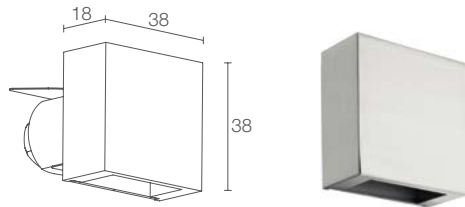

STEP INSIDE 2.8

Ø 70 mm
H 70 mm
Ø 30 mm

CE EAC LED TECH III kg 0.18 IP40
A A+ A++ EPS CASAMBI

2W 24Vdc
SP2800 D E White
SP2800 D C Chrome
SP2800 D S Satin
SP2800 D N Black
SP2800 D T Cor-ten
SP2800 D 4 Light ivory

F - 2700K
 5 - 3000K
 9 - 4000K
 0 - 5000K
 1 - blue

diffuse

145 lm (3000K)

35 lm (3000K)

1 power LED
 1/4 ANSI BIN (white LED colour)
 50000h L90 B10 (Ta 25°C)

body and cover in aluminium
 screen in transparent extra-clear glass

not included, see p. 904

includes 1.5 m PVC cable
 FROR 2x0.35/0.35 Ø3.5 mm



parallel

semi-recessed (wall)

see p. 709

outdoor version: Step Outside 2.6, p. 433

see p. 884

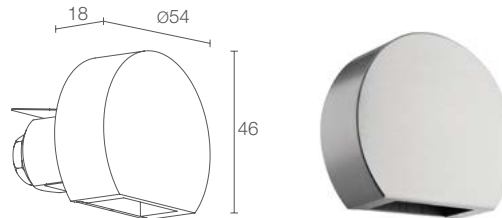

STEP INSIDE 2.9

Ø 70 mm
H 70 mm
Ø 30 mm

CE EAC LED TECH III kg 0.20 IP40
A A+ A++ EPS CASAMBI

2W 24Vdc
SP2900 D E White
SP2900 D C Chrome
SP2900 D S Satin
SP2900 D N Black
SP2900 D T Cor-ten
SP2900 D 4 Light ivory

F - 2700K
 5 - 3000K
 9 - 4000K
 0 - 5000K
 1 - blue

diffuse

145 lm (3000K)

35 lm (3000K)

1 power LED
 1/4 ANSI BIN (white LED colour)
 50000h L90 B10 (Ta 25°C)

body and cover in aluminium
 screen in transparent extra-clear glass

not included, see p. 904

includes 1.5 m PVC cable
 FROR 2x0.35/0.35 Ø3.5 mm

parallel

semi-recessed (wall)

see p. 709

outdoor version: Step Outside 2.7, p. 433



see p. 884



**POSITIONING
DIAGRAMS**

STEP INSIDE 2.2 / 2.3 / 2.8 / 2.9

D - Diffuse

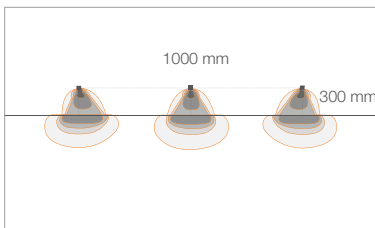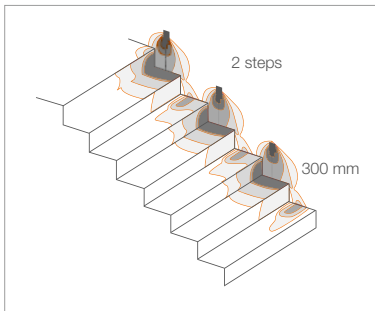

STANDARD FINISHES



White



Chrome



Satin



Black



Corten



Light ivory




ACCESSORIES AND POSITIONING DIAGRAMMS

ACCESSORIES FOR INSTALLATION



WC0202
Outer casing

STEP INSIDE 2.3
3000K, 2W, white

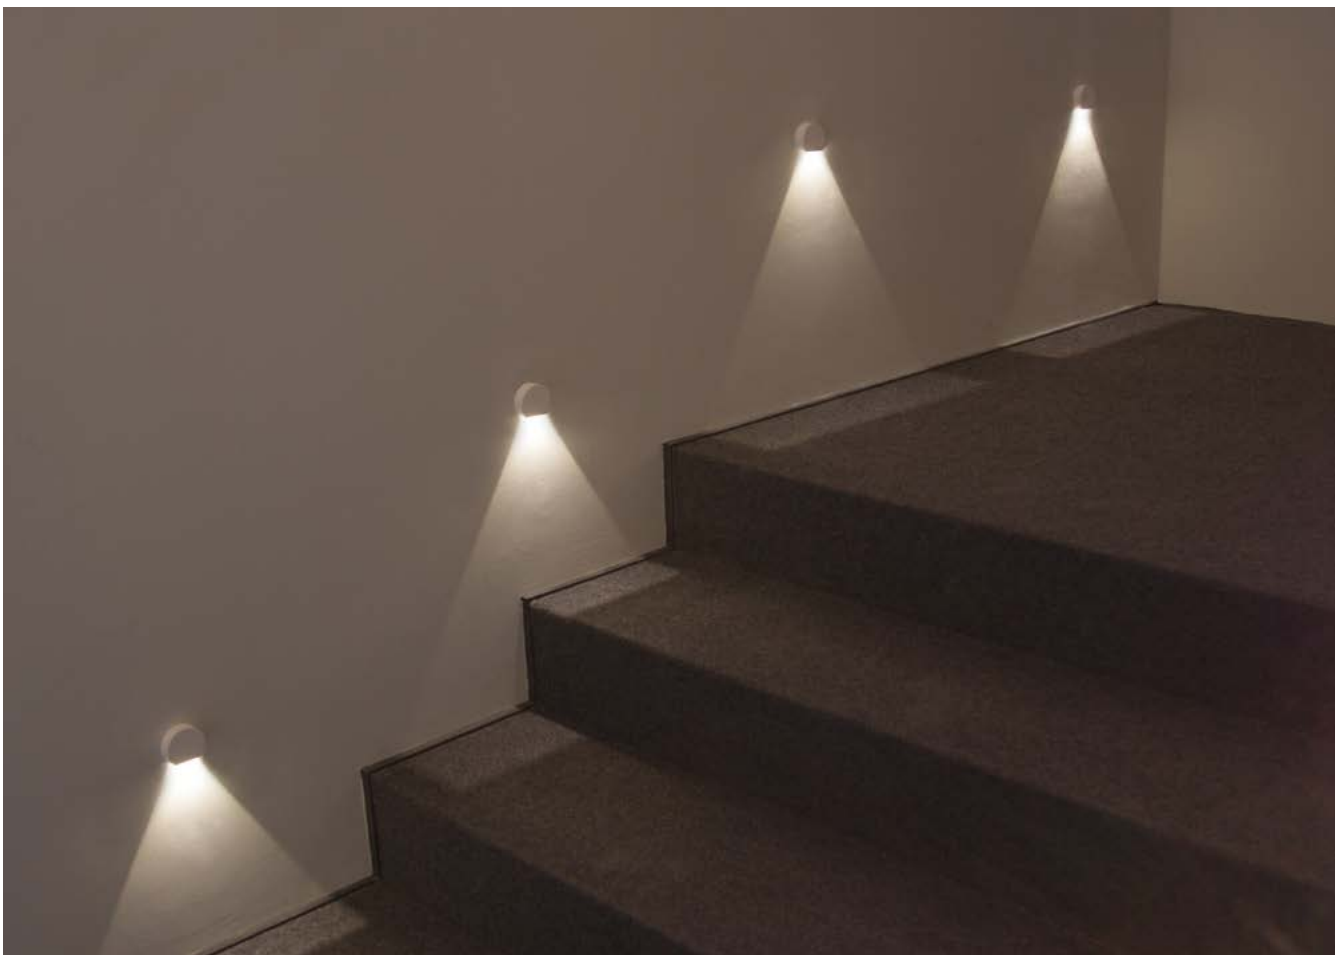

STEP INSIDE

INDOOR STEP LIGHTS

STEP INSIDE 2.2

2.3

2.8

2.9

D - Diffuse

Isolux (3000K)

