



READING LAMPS FOR HOSPITALITY AND PRIVATE HOMES



WALL MOUNTED



MOUNTED ON A SPARE GANG



MOUNTED ON A SHELF

ZOOM LENS

3000K 5000K



zoom lens



WALL 1 p. 634
2.5W 230Vac
3.5W 230Vac



WALL 3 p. 635
2.5W 230Vac
3.5W 230Vac

OPTICS VERSION

2700K 3000K 4000K 5000K



narrow medium wide




WALL 8.1 p. 637
2.5W 230Vac
3.5W 230Vac




WALL 8.0 p. 636
max 2W max 500mA



WALL 8.2 p. 637
2.5W 230Vac
3.5W 230Vac

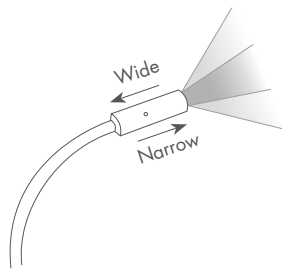


Adjustable beam

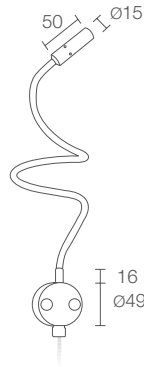

Flexible neck:
 Ø6 mm - 400 mm
 Ø8 mm - 400/500 mm



Standard version:
 bottom cable entry

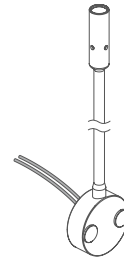

Available on request:
 rear cable entry



WALL 1

kg 0.30 400 mm Ø6 mm
 kg 0.32 400 mm Ø8 mm
 kg 0.33 500 mm Ø8 mm

IP20

A A+ A++

POWER / POWER SUPPLY CODE

2.5W 230Vac	400 mm	Neck Ø6 mm
L11640	C	Chrome
L11640	D	Gold
L11640	S	Satin
3.5W 230Vac	400 mm	Neck Ø6 mm
L12640	C	Chrome
L12640	D	Gold
L12640	S	Satin
2.5W 230Vac	400 mm	Neck Ø8 mm
L11840	C	Chrome
L11840	D	Gold
L11840	S	Satin
3.5W 230Vac	400 mm	Neck Ø8 mm
L12840	C	Chrome
L12840	D	Gold
L12840	S	Satin
2.5W 230Vac	500 mm	Neck Ø8 mm
L11850	C	Chrome
L11850	D	Gold
L11850	S	Satin
3.5W 230Vac	500 mm	Neck Ø8 mm
L12850	C	Chrome
L12850	D	Gold
L12850	S	Satin

LED COLOUR


5 - 3000K
0 - 5000K

OPTICS

optical range 20–55°

LUMEN OUTPUT AT SOURCE	145 lm (3000K, 3.5W)
DELIVERED LUMEN OUTPUT	61 lm (3000K, 3.5W)
NO. AND TYPE OF LEDS	1 power LED 1/4 ANSI BIN, 50000h L90 B10 (T _a 25°C)
MATERIAL	body in aluminium, neck in brass
POWER SUPPLY UNIT	power supply unit built into plug with switch on cable
POWER CABLES	includes 1.5 m cable, with built-in plug and PSU
MOUNTING	surface mounted (wall)
NOTES	version with rear cable entry available on request Casambi-compatible version, controllable with the Casambi app, available on request
PHOTOMETRIC DATA	see p. 900



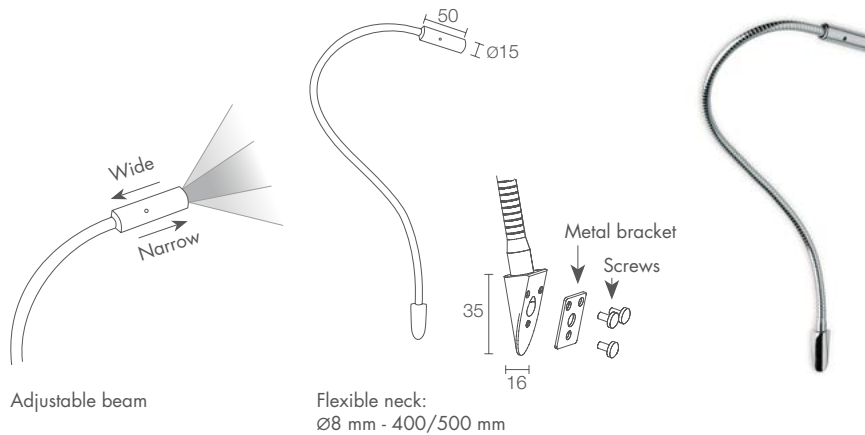

Adjustable beam

Flexible neck:
Ø8 mm - 400/500 mm

WALL 3

kg 0.19 400 mm
 kg 0.29 500 mm IP20
A A+ A++

POWER / POWER SUPPLY CODE

2.5W 230Vac 400 mm Neck Ø8 mm
PL11840 C Chrome
PL11840 D Gold
PL11840 S Satin

 3.5W 230Vac 400 mm Neck Ø8 mm
PL12840 C Chrome
PL12840 D Gold
PL12840 S Satin

 2.5W 230Vac 500 mm Neck Ø8 mm
PL11850 C Chrome
PL11850 D Gold
PL11850 S Satin

 3.5W 230Vac 500 mm Neck Ø8 mm
PL12850 C Chrome
PL12850 D Gold
PL12850 S Satin

LED COLOUR

5 - 3000K
0 - 5000K

OPTICS


optical range 20–55°

LUMEN OUTPUT AT SOURCE	145 lm (3000K, 3.5W)
DELIVERED LUMEN OUTPUT	61 lm (3000K, 3.5W)
NO. AND TYPE OF LEDS	1 power LED 1/4 ANSI BIN, 50000h L90 B10 (Ta 25°C)
MATERIAL	body in aluminium, neck in brass
POWER SUPPLY UNIT	included
POWER CABLES	includes 0.30 m two-core cable
MOUNTING	on a spare gang
NOTES	Casambi-compatible version, controllable with the Casambi app, available on request
PHOTOMETRIC DATA	see p. 900



✓
WALL 1
 3000K, 2.5W, satin, customized version
 with rear cable entry

Private collection, Milan, Italy
 Courtesy of / Susanna Roda

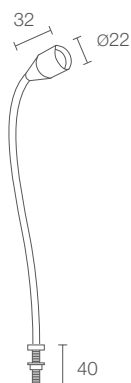

Flexible neck:
 Ø8 mm - 400 mm



WALL 8.0

CE ENEC LED TECH III kg 0.16 IP40

A A+ A++

POWER / POWER SUPPLY CODE

max 2W max 500mA 400 mm
PL801240 ■ C Chrome
PL801240 ■ S Satin

LED COLOUR

F - 2700K
5 - 3000K
9 - 4000K
0 - 5000K


OPTICS

S - 10°
M - 25°
L - 40°

LUMEN OUTPUT AT SOURCE	145 lm (3000K, 500mA)
DELIVERED LUMEN OUTPUT	103 lm (3000K, 500mA, 25°)
NO. AND TYPE OF LEDS	1 power LED 1/4 ANSI BIN, 50000h L90 B10 (Ta 25°C)
MATERIAL	body in aluminium, neck in brass
POWER SUPPLY UNIT	not included, see p. 904
POWER CABLES	includes 0.50 m PVC cable FROR 2x0.35 Ø3.5 mm
WIRING	series
MOUNTING	surface mounted (shelf max 30 mm)
ACCESSORIES	see p. 639
NOTES	Casambi-compatible version, controllable with the Casambi app, available on request
PHOTOMETRIC DATA	see p. 900



Flexible neck:
Ø8 mm - 400 mm

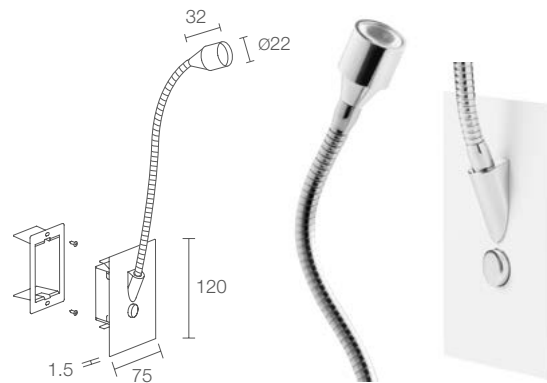

Flexible neck:
Ø8 mm - 400 mm

Chrome finish: white plate
Satin finish: satin plate

WALL 8.1

CE ENEC LED TECH kg 0.34 IP20

A A+ A++

2.5W 230Vac 400 mm
PL811140 C Chrome
PL811140 S Satin

3.5W 230Vac 400 mm
PL811240 C Chrome
PL811240 S Satin

F - 2700K
 5 - 3000K
 9 - 4000K
 0 - 5000K

S - 10°
 M - 25°
 L - 40°

145 lm (3000K, 3.5W)

103 lm (3000K, 25°, 3.5W)

1 power LED
 1/4 ANSI BIN, 50000h L90 B10 (Ta 25°C)

body in aluminium, neck in brass
 base in steel

built in with switch on base of neck

none

mains voltage

surface mounted (wall)

none

Casambi-compatible version, controllable with
 the Casambi app, available on request

see p. 900

WALL 8.2

CE ENEC LED TECH kg 0.37 IP20

A A+ A++

2.5W 230Vac 400 mm
PL821140 C Chrome
PL821140 S Satin

3.5W 230Vac 400 mm
PL821240 C Chrome
PL821240 S Satin

F - 2700K
 5 - 3000K
 9 - 4000K
 0 - 5000K

S - 10°
 M - 25°
 L - 40°

145 lm (3000K, 3.5W)

103 lm (3000K, 25°, 3.5W)

1 power LED
 1/4 ANSI BIN, 50000h L90 B10 (Ta 25°C)

body in aluminium, neck in brass
 plate in steel

built in with switch on base of neck

includes 0.30 m two-core cable


mains voltage

surface mounted (wall)

see p. 639

Casambi-compatible version, controllable with
 the Casambi app, available on request

see p. 900





ACCESSORIES

ACCESSORIES FOR INSTALLATION



WC0301

Optional outer casing
(Wall 8.2)

POWER CABLES

PVC cable
FROR 2x0.35 Ø3.5 mm
your choice of length

WF0110

(Wall 8.0)


order together with the lighting fixture

WALL


READING LAMPS

WALL 1 3

20° (20°–55°)

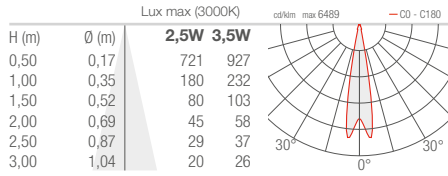


55° (20°–55°)

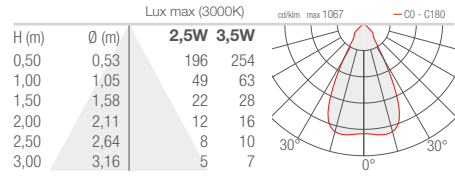


WALL 8.0


S - 10°

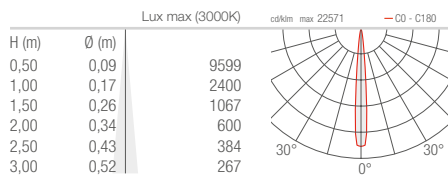

M - 25°

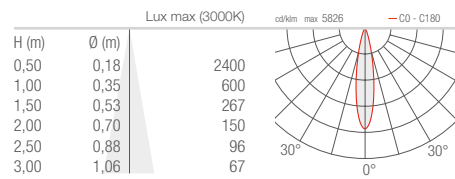


L - 40°

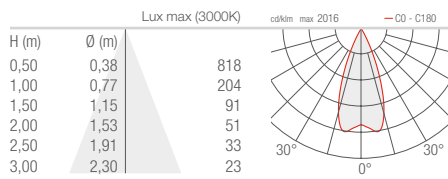


WALL 8.1 8.2

S - 10°

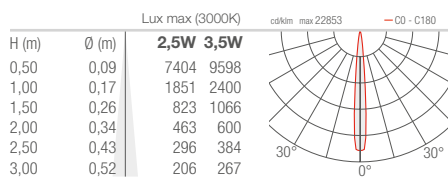

M - 25°

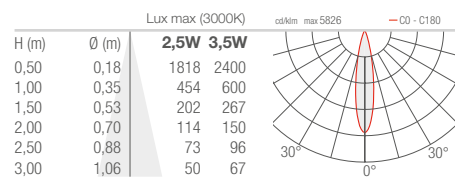

L - 40°

